


Tool Up with CP
worth the difference

CHICAGO PNEUMATIC AUTOMOTIVE SERVICE TOOLS

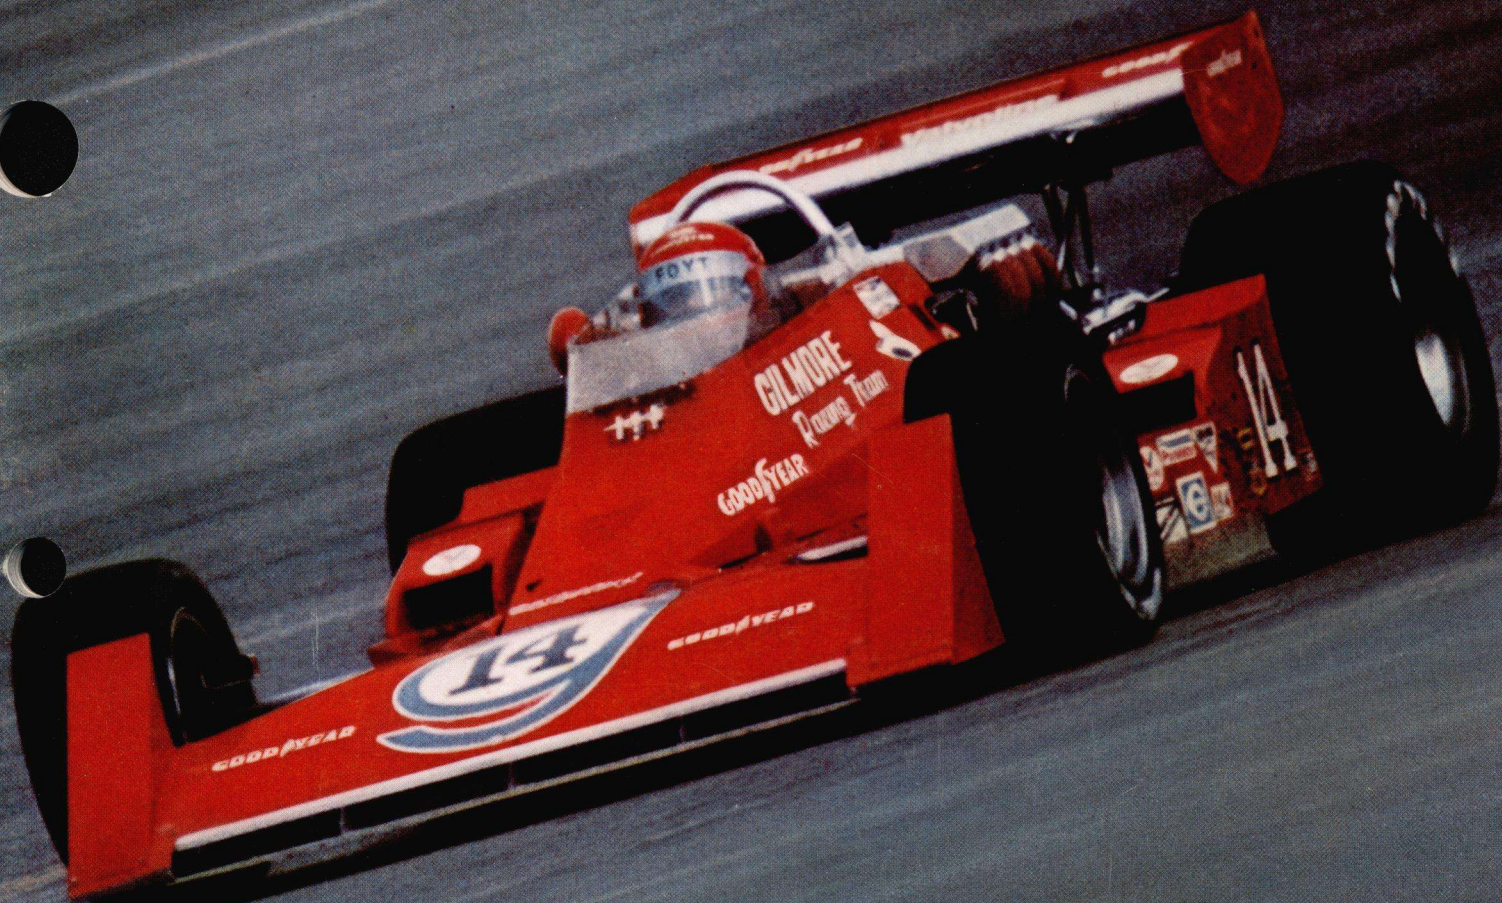

"CP tools cost more, but you can't afford less."

A. J. Foyt—Indy, Daytona, and Lemans Winner
The winningest driver in racing.

It's tough to win on the racing circuit. The car, the driver, the mechanics, the tools—everything's gotta be right. That means Chicago Pneumatic tools are a necessity in my job. They represent the best in power, performance, durability and quality . . . and are a "must" on my racing team.

Maybe you think they're a luxury in yours. Well, they're not.

Chicago Pneumatic air tools give you more of what you pay for:

Best design.

You get the most efficient operation because CP air tools are engineered to the tightest tolerances . . . and their patented clutch designs consistently give the greatest output per pound.

Best materials.

You get hard-working tools all day every day because CP tools are made of only the finest steels, heat treated for even greater strength with every critical moving part fully ground and polished.

Best performance.

You get the job done faster, easier, because CP tools are rugged and dependable. They make more money for you because they outlast lesser air tools.

Best trial offer.

You get a company that stands behind what it makes. If you aren't satisfied with your CP tool within 30 days after purchase, you get your money back.

Take a good look at CP's high quality specifications in this catalog. Match the Chicago Pneumatic tool to your job. Then see the CP line at your CP jobber.

Tool Up with CP
worth the difference



Index

Description	Page
Accessories	36
Customer Service	46
Drills	700 Series 23 800 Series 34-35
Grinders	700 Series 22 800 Series 33
Jacks, Pneu-draulic™	24
Polisher	32
Pumps, Fluid Ballast and Pneu-draulic™	25
Sanders	700 Series 22 800 Series 29-33
Service Centers	46
Warranty	47
Wrenches	
Speed-Ratchet®	700 Series 5 800 Series 26
3/8" square drive	700 Series 6-8 800 Series 26-27
1/2" square drive	700 Series 9-13 800 Series 27
3/4" square drive	700 Series 14 800 Series 28
1" square drive	700 Series 15-18 800 Series 28
#5 spline drive	700 Series 15 & 17-18
Zip-Guns®	700 Series 19-21 800 Series 35

Air-Wrench Data

Tool	Compressor Min. h.p.	Average Air Consumption (cfm)	Recommended Air Hose Size (inches)	Capacity Std. Bolt Size (inches)	Drive Size	Air Inlet (FPT) (inches)	Adjustable Torque Range ft-lbs	Recommended Ultimate Torque*
CP-720, 21	1	2½	3/8	3/8	3/8" Sq.	¼	10-75	75
CP-723	1	2½	3/8	3/8	3/8" Sq.	¼	10-80	80
CP-728	1	4	¼	3/8	3/8" Sq.	¼	0-7	7
CP-734	1	3½	3/8	½	½" Sq.	¼	25-300	300
CP-740	1	4	3/8	½	½" Sq.	¼	25-250	250
CP-740-TL-2	1	4	3/8	½	½" Sq.	¼	80-250	80
CP-744	1	4	3/8	5/8	½" Sq.	¼	25-350	350
CP-751	1	4½	3/8	5/8	½" Sq.	¼	25-250	250
CP-772	1½	7½	3/8	1	¾" Sq.	¼	100-700	700
CP-791	3	12	½	1¼	1" Sq.; #5 Spl.	½	100-1400	1400
CP-793	3	10	½	1¼	1" Sq.	¾	150-1400	1400
CP-796	3	12	½	1¾	1" Sq.	½	200-2000	2000
CP-797	3	12	½	1¼	1" Sq.; #5 Spl.	½	150-1350	1350
CP-828	1	3	3/8	3/8	3/8" Sq.	¼	10-45	45
CP-820	1	3	3/8	3/8	3/8" Sq.	¼	10-75	75
CP-821	1	3	3/8	3/8	3/8" Sq.	¼	10-75	75
CP-834	1	3½	3/8	½	½" Sq.	¼	25-285	285
CP-872	1½	8	3/8	7/8	¾" Sq.	¼	50-500	500
CP-897	3	12	½	1¼	1" Sq.	½	150-1350	1350

*Ultimate torque ratings are for air pressure of 100 psi at the tool. Higher air pressure may be used to speed up tool operation, but higher pressure should never be used to force tool to perform heavier work above stated capacity. Loading an Air-Wrench beyond its ultimate torque can drastically shorten its life.



CP-728

3/8" Speed-Ratchet® Wrench

Check These Quality Features:

- **Fast** . . . spins fasteners on or off 90% faster.
- **Convenient** . . . excellent for confined quarters.
- **Quality** . . . design backed by CP craftsmanship.

Mechanics agree that this tool is ideal for removing and replacing spark plugs, carburetors, water pumps and air conditioning components, for auto body and small engine repairs . . . and makes short work of servicing automatic transmissions in addition to its other applications.



Accessory Set CA-050228

Specifications

Square Drive	3/8"
Capacity (Std. Bolt Size)	3/8"
Net Weight	1 3/4 lbs
Overall Length	9 1/8"
Average Air Consumption	4 cfm
Air Inlet	1/4"
Minimum Hose Size	1/4"
Stall Torque	7 ft-lbs

CP-728 Speed-Ratchet Wrench
Shown with Speed-Ratchet Accessory
Set No. CA-050228

Set Includes:

CA-046270	6' Leader Hose
CA-046346	Socket Set (3/8" to 1 1/16" hex)
CA-046126	1 3/16" Spark Plug Socket
CA-046380	3" Extension Bar
CA-127021	Carry Case

See pages 36 through 45 for CP Accessories and other Accessory Sets.



CP-720

3/8" Air-Wrench

Check These Quality Features:

- **Compact** . . . easy to handle in tight places.
- **"Butterfly" throttle** . . . instant forward/reverse without changing grip.
- **LOK-ON Angle Head** . . . the optional attachment that adds 30% more usability.

CP-720 is used for fast removal and replacement of small fasteners. The right choice for general repair and body shops, service stations, and small engine repair shops.

Specifications



Square Drive	3/8"
Capacity (Std. Bolt Size)	3/8"
Net Weight	2 1/2 lbs
Overall Length	5 3/4"
Average Air Consumption	2 1/2 cfm
Air Inlet	1/4"
Minimum Hose Size	3/8"
Ult. Torque @ 100 psi	75 ft-lbs

CP-720 Air-Wrench
Shown with Accessory Set No. CA-050220

Set Includes:

CA-046251	Angle Head
CA-046346	Socket Set (3/8" to 1 1/16" hex)
CA-127018	Carry Case

See pages 36 through 45 for CP Accessories and other Accessory Sets.

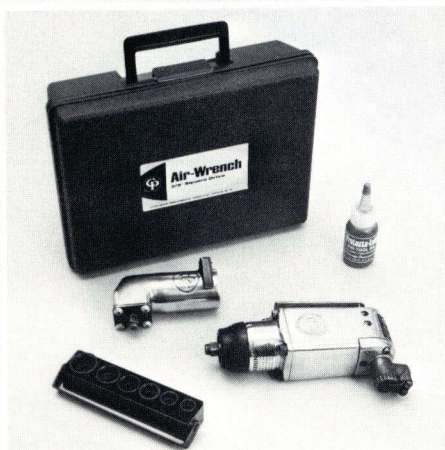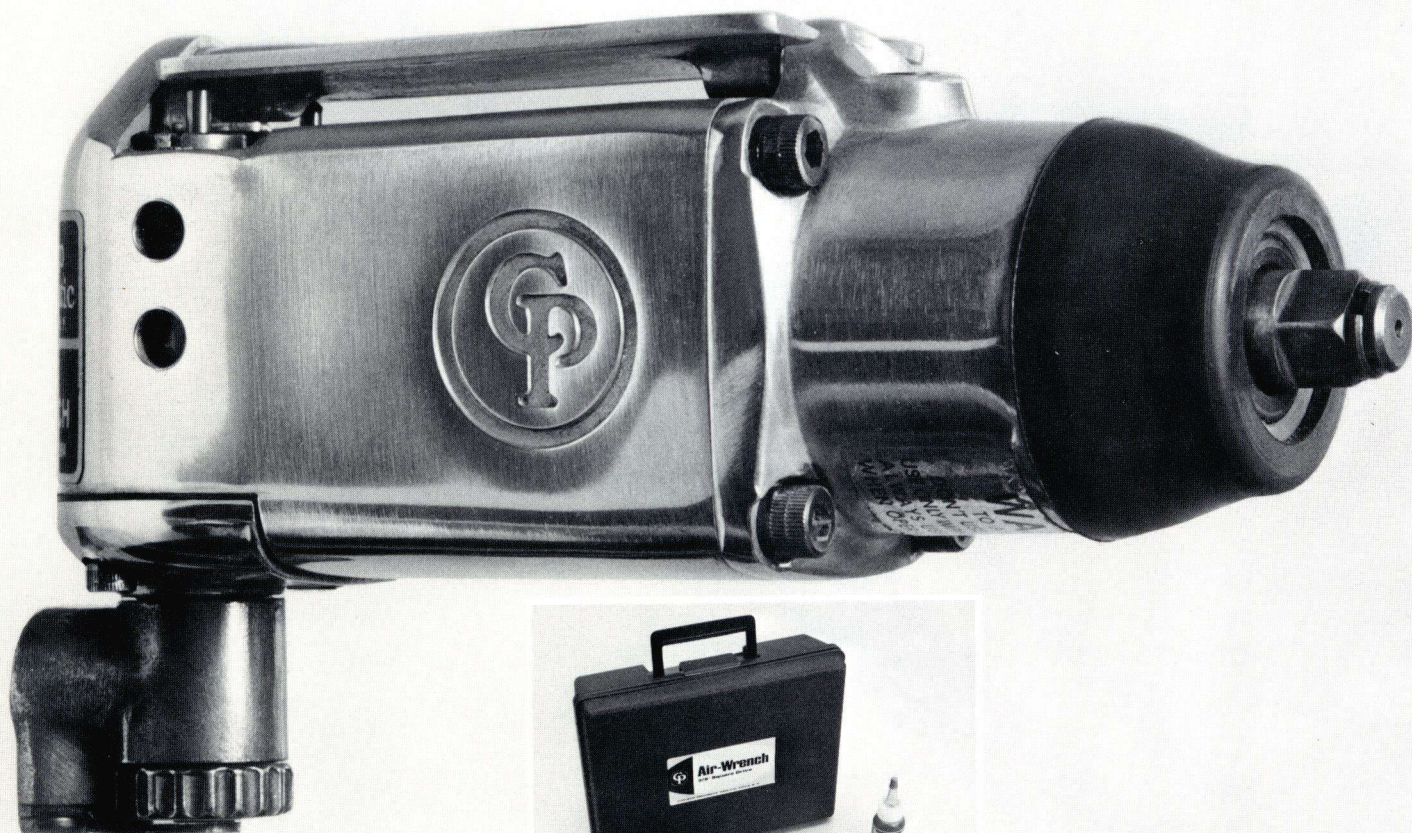

Accessory Set CA-050220

All applicable requirements of OSHA regulations can be met with this tool.

CP-721

3/8" Air-Wrench

Check These Quality Features:

- **Convenient** . . . pistol-grip handle and forward/reverse button.
- **Power regulator** . . . built-in for matching power to the job.
- **Trigger control** . . . comfortable and infinitely variable.
- **LOK-ON Angle Head** . . . the optional attachment that adds 30% more useability.

The CP-721 Air-Wrench, with pistol-grip handle, is designed for use on bench work. Ideal for transmission tear-down and assembly, this tool is also suited for maintenance work in marinas, motorcycle shops and small engine repair centers.

LOK-ON Angle Head attachment that easily secures to Air-Wrench is available. This attachment increases tool's usefulness by as much as 30% by getting at fasteners around corners not normally accessible to a power tool.

Specifications

Square Drive	3/8"
Capacity (Std. Bolt Size)	3/8"
Net Weight	2 1/2 lbs
Overall Length	5 3/4"
Average Air Consumption	2 1/2 cfm
Air Inlet	1/4"
Minimum Hose Size	3/8"
Ult. Torque @ 100 psi	75 ft-lbs

CP-721

Air-Wrench

shown with Accessory Set No. CA-050222

Set Includes:

CA-046200	Magnetic Bit Holder
CA-046201	# 1 Phillips Bit
CA-046202	# 2 Phillips Bit
CA-046203	# 3 Phillips Bit
CA-046380	3" Extension Bar
CA-046386	Universal Joint
CA-046251	Angle Head
CA-046346	Socket Set (3/8" to 1 1/8" hex)
CA-127018	Carry Case

See Pages 36 through 45 for CP Accessories and other Accessory Sets.



Accessory Set CA-050222

All applicable requirements of OSHA regulations can be met with this tool.

CP-723

3/8" Air Wrench

Check These Quality Features:

- **Dyna-Pact® Clutch** . . . high torque in a small package.
- **Lightweight, compact design** . . . almost becomes "part of your hand."
- **Built-in power regulator** . . . varies output to suit the job.
- **Supported Ring Socket Retainer** . . . for positive socket retention.
- **Long-life construction** . . . hardened and ground bevel gears and full ball bearing construction.

Power, performance and versatility make the CP-723 the ideal tool for general repair and body shops, service stations and small engine repair shops. The CP-723 gets into those confined, hard-to-reach places on engines and transmissions.

®U.S. Patent No. 3174597

Specifications

Square Drive	3/8"
Capacity (Std. Bolt Size)	3/8"
Net Weight	3 1/8 lbs
Head Length (Clearance)	3 1/2"
Handle Length	7 3/8"
Average Air Consumption	2 1/2 cfm
Air Inlet	1/4"
Minimum Hose Size	3/8"
Ult. Torque @ 100 psi	80 ft-lbs

CP-723 Air-Wrench Shown with Accessory Set No. CA-050223

Set Includes:

CA-046346	Socket Set (3/8" to 1 1/16" hex)
CA-046380	3" Extension
CA-046386	U-Joint
CA-047270	2' Leader Hose
CA-047300	Nipple
CA-047302	Coupler
CA-127018	Carry Case

See pages 36 through 45 for CP Accessories and other Accessory Sets.



Accessory Set CA-050223

All applicable requirements of OSHA regulations can be met with this tool.

CP-734

1/2" Air-Wrench

Check These Quality Features:

- **Performance** . . . proven dependability —the mechanic's choice.
- **Durable** . . . patented *Dyna-Pact** clutch and proven long-life motor.
- **QUICK-LOK Angle Head** . . . the attachment that handles 30% more jobs.
- **Power regulator** . . . built-in to adjust speed to work.
- **Most-copied housing design** . . . comfortable for left or right hand use.

Ideal for the "Professional" mechanic, the CP-734 is designed for convenient one-hand operation. Lightweight and compact, the CP-734 includes built-in power regulator and one-hand forward/reverse. More mechanics own CP-734's than any other 1/2" air wrench.

*U.S. Patent No. 3174597

Specifications

Square Drive	1/2"
Capacity (Std. Bolt Size)	1/2"
Net Weight	4 3/4 lbs
Overall Length	6 1/4"
Average Air Consumption	3 1/2 cfm
Air Inlet	1/4"
Minimum Hose Size	3/8"
Ult. Torque @ 100 psi	275 ft-lbs

CP-734 Air-Wrench Shown with 1/2" Air-Wrench Accessory Set No. CA-050233

Set Includes:

CA-047270	2' Leader Hose
CA-047273	50', 3/8" Air Hose
CA-047300	Quick Coupler
CA-047302	Nipple
CA-047346	Socket Set (1/2" to 1 3/8" hex)
CA-127019	Carry Case

See pages 36 through 45 for CP Accessories and other Accessory Sets.



Accessory Set CA-050233

All applicable requirements of OSHA regulations can be met with this tool.

CP-740

1/2" Air-Wrench/Heavy Duty

Check These Quality Features:

- **Heavy Duty** . . . designed for the really tough jobs.
- **Powerful** . . . VARI-TORK and built-in power control provides positive torque output.
- **Durable** . . . quality construction and rugged dependability.
- **Versatile** . . . optional QUICK-LOK Angle Head.

- **Optional** . . . available with 2" extended shank for tire and fleet applications.

The heavier-duty, super-quality Air-Wrench is specifically designed for tool applications that require that something extra to get the job done. The CP-740 provides the ultimate in dependability, performance and all-around quality. Rubber scuff guards, back and front, offer additional housing protection.

Specifications

Drive	1/2"
Capacity (Std. Bolt Size)	1/2"
Net Weight	6 lbs.

Overall Length	6 7/8"
Average Air Consumption	4 cfm
Air Inlet	1/4"
Minimum Hose Size	3/8"
Ult. Torque @ 100 psi	250 ft-lbs

CP-740 Air-Wrench Shown with 1/2" Air-Wrench Accessory Set No. CA-050241

Set Includes:

CA-047253	Angle Head
CA-047346	Socket Set (1/2" to 1 3/16" hex)
CA-127019	Carry Case

Also available:

CP-740-2 Air-Wrench with 2" Extended Shank

See pages 36 through 45 for CP Accessories and other Accessory Sets.



Accessory Set CA-050241

CP-740-TL-2

Torque Limited 1/2" Air-Wrench

Check These Quality Features:

- **Torque Limiter†** . . . consistently tightens each lug nut to 80 ft-lbs.*
- **Simple operation** . . . no complicated adjustments or special training required.
- **Selector lever** . . . set lever for right or left hand threads.
- **Powerful** . . . allows removal of rusted-on wheel nuts with full power.
- **Durable** . . . rubber scuff guard offers housing protection.
- **Standard equipment** . . . comes equipped with Flip Socket (3/4" and 13/16").

The CP-740-TL-2 is the revolutionary air-wrench with a built-in Torque Limiter. Designed specifically for tire shop applications, it eliminates the

problems of overtightening, broken wheel studs, and warped disc brake rotors. It provides the assurance that finished tire work is according to specification, without the added time and expense of hand torquing. Output torque is consistent—REGARDLESS of air pressure!

Specifications

Drive	1/2"
Capacity (Std. Bolt Size)	1/2"
Net Weight	6 lbs 2 oz
Overall Length	9 3/4"
Average Air Consumption	4 cfm
Air Inlet	1/4"
Minimum Hose Size	3/8"
Ult. Torque @ 100 psi (w/o Limiter)	250 ft-lbs

Limited Torque—any pressure 80 ft-lbs
†Patent applied for.



*Depending on lug nut, thread, or rim condition, a 5% variance can sometimes be expected.

**CP-740-TL-2 Torque Limited Air-Wrench
Shown with Tire Shop Accessory Set No.
CA-050242**

Set Includes:

CA-047347	Socket Set (3/4" to 1 1/16" hex)
CA-047273	50' 3/8" Air Hose
CA-047270	2' Leader Hose
CA-047300	Quick Coupler
CA-047302	Nipple
CA-127019	Carry Case

See pages 36 through 45 for CP Accessories and other Accessory Sets.

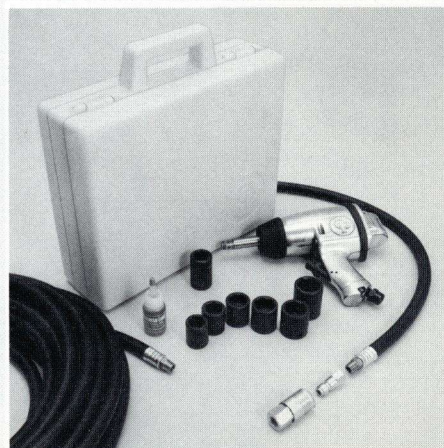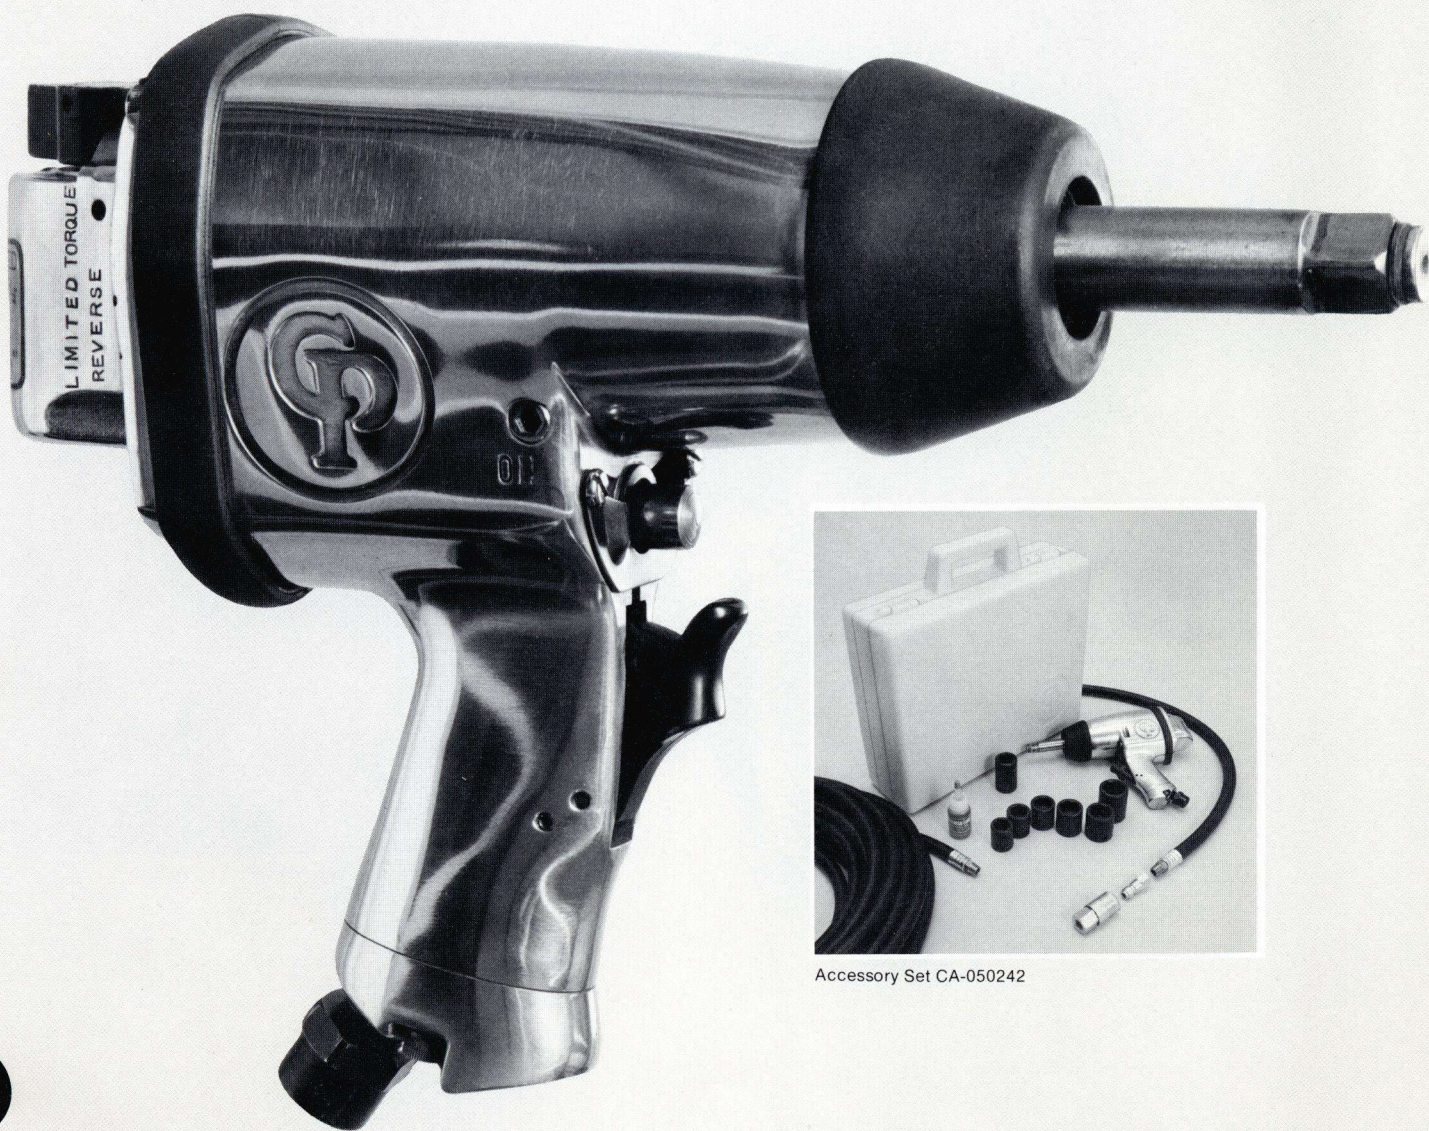

Accessory Set CA-050242

All applicable requirements of OSHA regulations can be met with this tool.

CP-744

1/2" Air-Wrench

Check These Quality Features:

- **Powerful** . . . 30% more power than any current CP model.
- **Lightweight** . . . best power-to-weight ratio available.
- **Efficient** . . . uses less air than competitive 1/2" wrenches.
- **Durable** . . . patented *Dyna-Pact** clutch and proven motor.

*U.S. Patent No. 3174597

The most powerful CP 1/2" air-wrench available! A top quality tool, the CP-744 delivers higher torque for the really tough jobs. It is the ideal choice for general auto and body repair, fleet service, exhaust replacement, marine and farm repair, and engine rebuilding.

Specifications

Square Drive	1/2"
Capacity (Std. Bolt Size)	1/2"
Net Weight	6 lbs
Overall Length	7 1/2"
Average Air Consumption	4 cfm
Air Inlet	1/4"
Recommended Hose Size	3/8"
Ultimate Torque @ 100 psi	300 + ft-lbs

CP-744 Air-Wrench
Shown with 1/2" Air-Wrench Accessory Set
No. CA-050244

Set Includes:

CA-047346 Socket Set (1/2" to 1 3/16" hex)
CA-127019 Carry Case

See pages 36 through 45 for CP Accessories and other Accessory Sets.



Accessory Set CA-050244

All applicable requirements of OSHA regulations can be met with this tool.

CP-751

1/2" Air-Wrench/Rugged Duty

Check These Quality Features:

- **Rugged** . . . a dependable performer.
- **Supported ring socket retainer** . . . retains sockets firmly but allows quick changing.
- **Powerful** . . . Trigger Power Control and built-in regulator.
- **Versatile** . . . recommended for tire, fleet and spring shops.
- **Optional** . . . available with 2" extended shank for recessed rims.

The CP-751 is a highly dependable performer. This rugged duty wrench is especially recommended for tire, fleet, front-end and spring shops. Durability offered by the CP-751 makes it the top performer in its class.

Specifications

Drive	1/2"
Capacity (Std. Bolt Size)	5/8"
Net Weight	9 1/2 lbs
Overall Length	7 3/4"
Average Air Consumption	4 1/2 cfm
Air Inlet	1/4"
Minimum Hose Size	3/8"
Ult. Torque @ 100 psi	250 ft-lbs

CP-751 Air-Wrench

Also available:

CP-751-2 Air-Wrench with 2" Extended Shank

Includes:


CA-047326 Flip Socket (3/4" and 13/16")

Shown with Tire Shop Accessory Set No. CA-050242

Set Includes:

CA-047347	Socket Set (3/4" to 1 1/16" hex)
CA-047273	50' 3/8" Air Hose
CA-047270	2' Leader Hose
CA-047300	Quick Coupler
CA-047302	Nipple
CA-127019	Carry Case

See pages 36 through 45 for CP Accessories and other Accessory Sets.

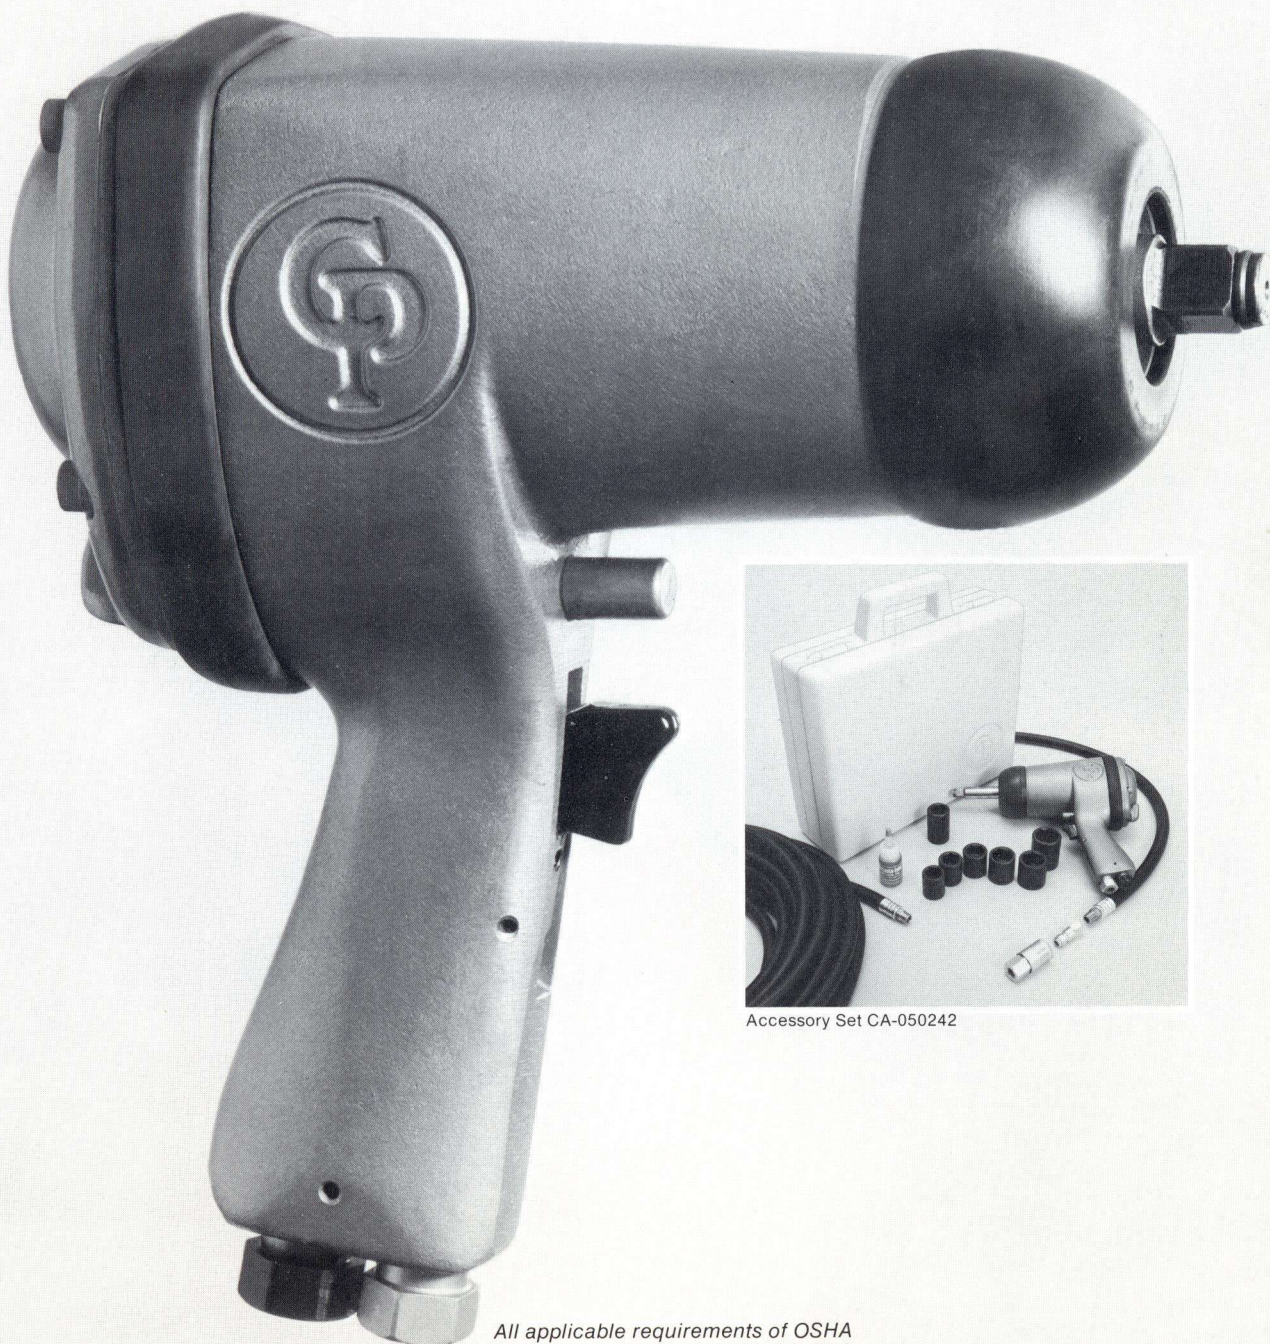

Accessory Set CA-050242

All applicable requirements of OSHA regulations can be met with this tool.

CP-772

3/4" Air-Wrench

Check These Quality Features:

- **Lightweight** . . . only 10 1/4 pounds and comfortably balanced.
- **Dependable power** . . . patented **Dyna-Pact*** Clutch develops 700 ft-lbs torque.
- **Durable** . . . quality workmanship and materials assure long life and top performance.

*U.S. Patent No. 3174597

The CP-772 is the perfect choice for truck, farm and fleet repair, rebuilding diesel engines and equipment assembly. Rubber scuff guards protect the nose and housing of the tool. CP's supported ring socket retainer makes socket changing quick and easy—yet holds securely during use.

Specifications

Drive	3/4"
Capacity (Std. Bolt Size)	1"
Net Weight	10 1/4 lbs
Overall Length	8"
Average Air Consumption	7 1/2 cfm
Air Inlet	1/4"
Minimum Hose Size	3/8"
Ult. Torque @ 100 psi	700 ft-lbs

CP-772 Air-Wrench Shown with General Purpose Accessory Set No. CA-050175

Set Includes:

CA-054365	Socket Set (3/4" to 1 1/4" hex, 1 3/16" and 1 1/2" deep hex and 1 3/16" Square)
CA-048380	6" Extension Bar
CA-047270	2' Leader Hose
CA-047300	Quick Coupler
CA-047302	Nipple
CA-085982	Metal Socket Box

See pages 36 through 45 for CP Accessories and other Accessory Sets.



Accessory Set CA-050175

All applicable requirements of OSHA regulations can be met with this tool.

CP-791-6

1" Air-Wrench

1" square drive or #5 spline drive

Check These Quality Features:

- **Extra-rugged** . . . the super tire tool to handle the toughest jobs.
- **"Select-Aire" Valve** . . . allows quick switch from reduced to maximum torque.
- **Powerful** . . . delivers up to 1400 ft-lbs torque.
- **Reliable** . . . trouble-free oil-lubricated clutch mechanism.

- **Protected** . . . integral air strainer and oiler prevent premature wear.

Past performance proves the CP-791 is the choice for handling the toughest jobs with ease. The versatility and added improvements make this the most reliable air-wrench of its kind for high volume truck tire operations and for tire service trucks.

Specifications

Drive	1" Sq. or #5 Spline
Capacity (Std. Bolt Size)	1 1/4"
Net Weight (with 6" shank)	34 lbs
Overall Length	15 3/4"
Average Air Consumption	12 cfm
Air Inlet	1/2"
Minimum Hose Size	1/2"
Ult. Torque @ 100 psi	1400 ft-lbs

CP-791 Air-Wrench
CP-791-6 Air-Wrench with 6" Extended Shank

Rugged-Duty Tire Shop
Accessory Set No. CA-050191


Set Includes:

CA-049270	2' Leader Hose
CA-049272	50' 1/2" Air Hose
CA-049301	Quick Coupler
CA-049304	Nipple
CA-096160	Socket Set (7/8" to 1 1/4" hex, 1 1/2" hex Budd, 1 3/16" Square, and 1" to 3/4" Adapter)
CA-085982	Metal Socket Box

Also available:

CP-791SP-6 Air-Wrench with #5 Spline Drive and 6" Extended Shank

See pages 36 through 45 for CP Accessories and other Accessory Sets.

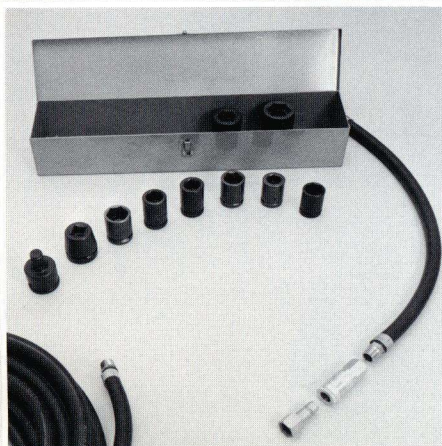

Accessory Set CA-050191

All applicable requirements of OSHA regulations can be met with this tool.

CP-793SH

1" Air-Wrench 1" square drive

Check These Quality Features:

- **Powerful** . . . plenty of reserve power up to 1400 ft-lbs.
- **Efficient** . . . *Dyna-Pact** clutch gets the job done quickly with low air consumption.
- **Durable** . . . quality construction and materials mean long life and top performance.
- **Versatile** . . . moveable dead handle adjusts to suit the job.

*U.S. Patent No. 3174597

The CP-793SH Air-Wrench is a dependable performer for general duty spring, fleet, tire and farm equipment work. Rubber scuff guard protects the nose and housing.

Specifications

Drive	1" sq.
Capacity (Std. Bolt Size)	1 1/4"
Net Weight	23 lbs
Length (Excluding Drive)	9 1/2"
Average Air Consumption	10 cfm
Air Inlet	3/8"
Minimum Hose Size	1/2"
Ult. Torque @ 100 psi	1400 ft-lbs

CP-793SH Air-Wrench
Shown with General Purpose Accessory Set
No. CA-050195


Set Includes:

CA-049270	2' Leader Hose
CA-049301	Quick Coupler
CA-049304	Nipple
CA-049380	6" Extension Bar
CA-057502	Socket Set (1 5/16" to 1 7/8" deep hex and 1 3/16" Square)
CA-085982	Metal Socket Box

Also available:

CP-793SH-6 Air-Wrench with 6" Extended Shank

See pages 36 through 45 for CP Accessories and other Accessory Sets.

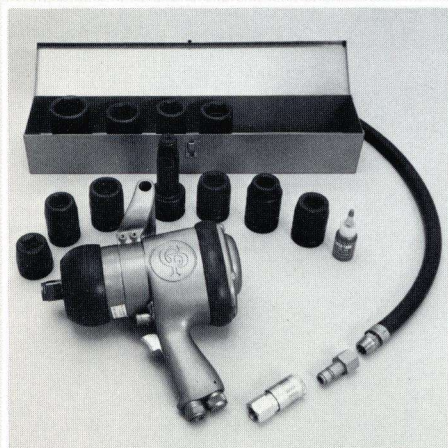

Accessory Set CA-050195

All applicable requirements of OSHA regulations can be met with this tool.

CP-796

1" Air-Wrench

1" square drive

Check These Quality Features:

- **Powerful** . . . unique Power-Pak* clutch develops over 2000 ft-lbs of torque from just a 20 lb tool.
- **Heavy duty** . . . does the really tough jobs on off-the-road equipment.
- **Durable** . . . finest heat-treated alloy steel assures long life and dependable performance.

*U.S. Patent No. 3428137

The CP-796 Air-Wrench is *the most powerful*, hard-working tool specifically designed for heavy duty fleet and farm equipment work. Developing an ultimate torque of over 2000 foot-pounds, it has all the reserve power you need.

Specifications

Drive	1" Sq.
Capacity (Std. Bolt Size)	1 3/8"
Net Weight (with dead handle)	20 lbs
Spindle Offset	2 1/8"
Overall Length	9 1/2"
Average Air Consumption	12 cfm
Air Inlet	1/2" NPTF


Recommended Hose Size 1/2" I.D.
Ult. Torque @ 100 psi 2000 ft-lbs

CP-796 Air-Wrench
Shown with Heavy-Duty Tire Shop Accessory
Set No. CA-050191

Set Includes:

CA-096160	Socket Set (7/8" to 1 1/4" hex, 1 1/2" hex Budd, 1 3/8" Square and 1" to 3/4" adapter)
CA-049272	50' 1/2" Air Hose
CA-049270	2' Leader Hose
CA-049301	Quick Coupler
CA-049304	Nipple
CA-085982	Metal Socket Box

See pages 36 through 45 for CP Accessories and other Accessory Sets.

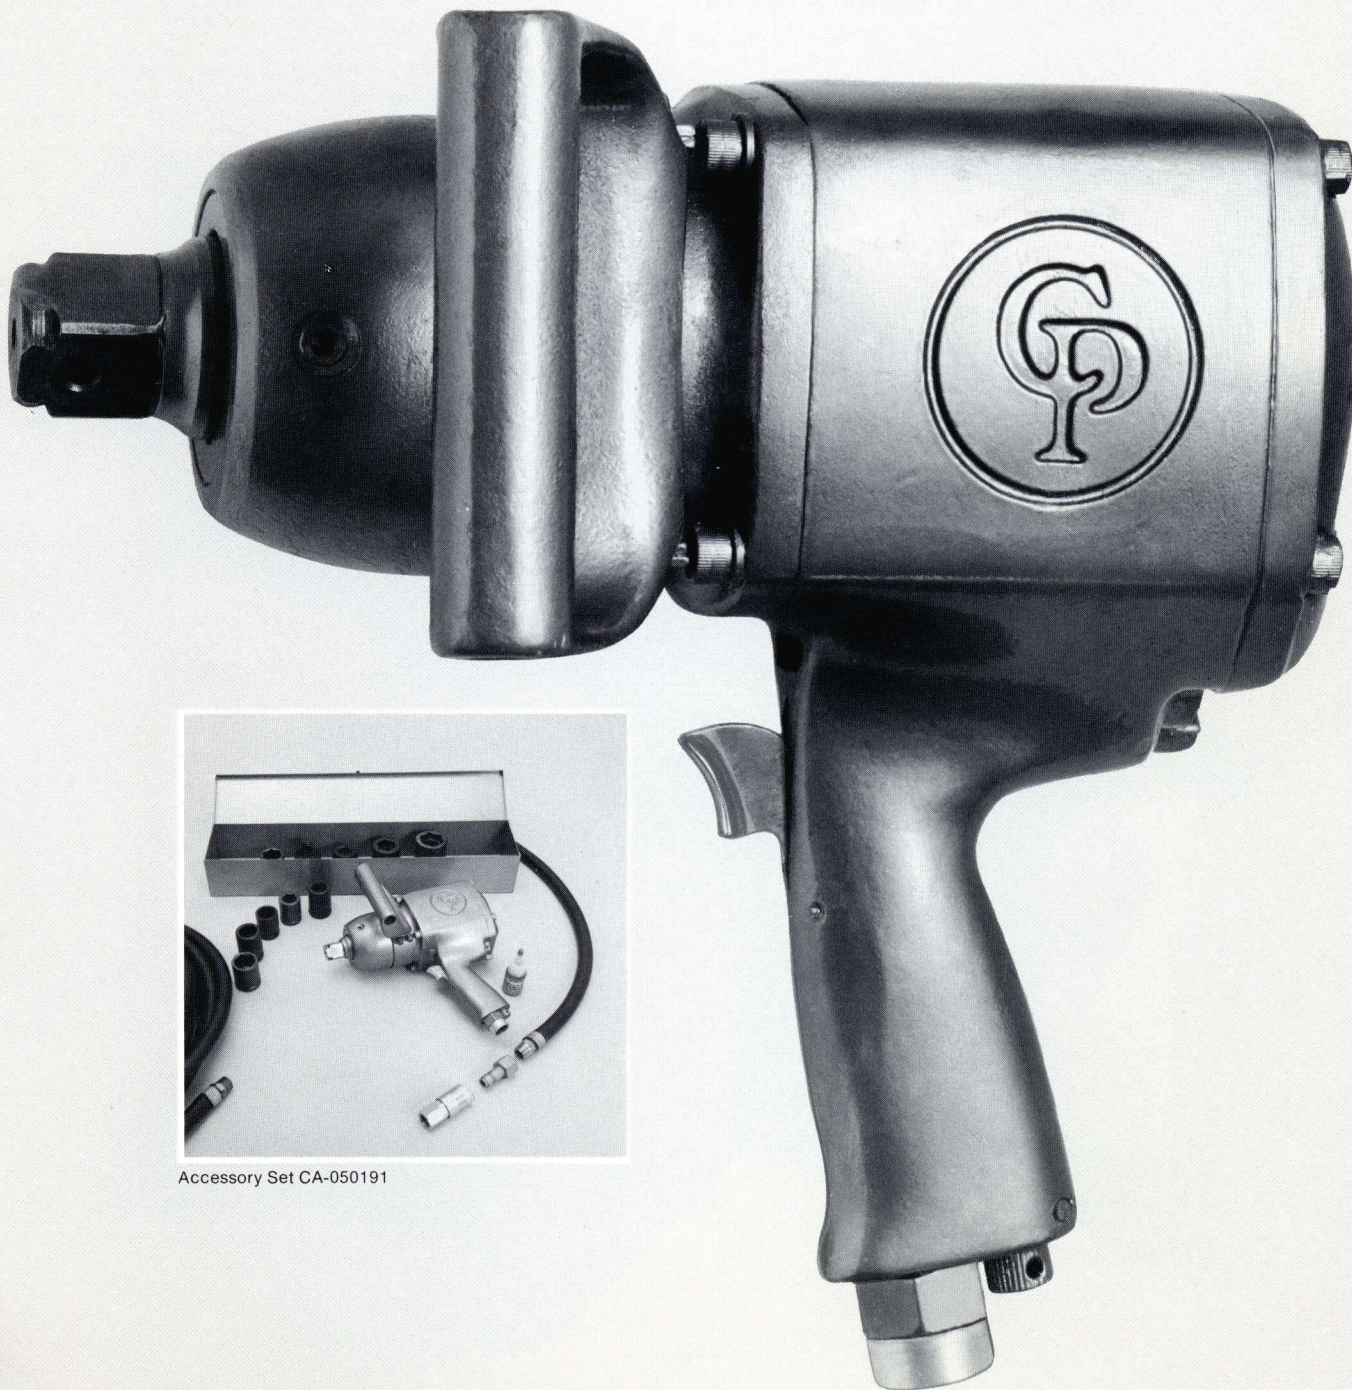

Accessory Set CA-050191

All applicable requirements of OSHA regulations can be met with this tool.

CP-797-6

1" Air-Wrench

1" square drive or #5 spline drive

Check These Quality Features:

- **Efficient** . . . handles the toughest job with lower air consumption.
- **Powerful** . . . 1350 ft-lbs of torque for heavy duty tire work.
- **Versatile** . . . supported ring socket retainer makes socket changing quick and simple.
- **Popular** . . . the tire industry's choice of dependability.

Durability. Power. Speed. Three great qualities in a single tool. The CP-797 is the heavy duty wrench especially designed for tire work on trucks and other heavy equipment. It is equipped with a 6" extended shank for recessed tire rims.

Specifications

Drive	1" Sq. or #5 Spline
Capacity (Std. Bolt Size)	1 1/4"
Net Weight	29 3/4 lbs
Overall Length	15 3/4"
Average Air Consumption	12 cfm
Air Inlet	1/2"
Minimum Hose Size	1/2"
Ult. Torque @ 100 psi	1350 ft-lbs

Shown with Heavy-Duty Tire Shop Accessory Set No. CA-050191


Set Includes:

CA-049270	2' Leader Hose
CA-049272	50' 1/2" Air Hose
CA-049301	Quick Coupler
CA-049304	Nipple
CA-096160	Socket Set (7/8" to 1 1/4" hex, 1 1/2" hex Budd, 1 3/16" Square and 1" to 3/4" adapter)
CA-085982	Metal Socket Box

Also available:

CP-797SP-6 Air-Wrench with #5 Spline Drive and 6" Extended Shank

See pages 36 through 45 for CP Accessories and other Accessory Sets.

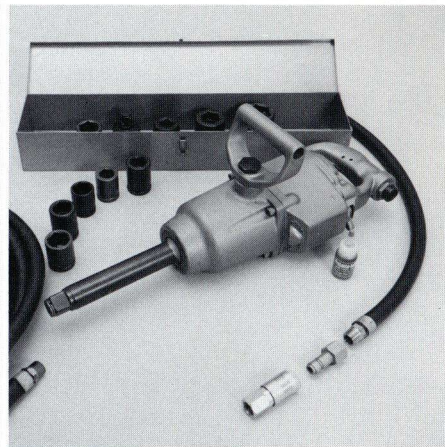

Accessory Set CA-050191



All applicable requirements of OSHA regulations can be met with this tool.

CP-710

"Hi-Speed" Zip-Gun®

Check These Quality Features:

- **Powerful** . . . 3500 bpm in this fast-hitting air-power zip-gun hammer.
- **Efficient** . . . rapid hammer action saves 75% of cutting time.
- **Versatile** . . . wide variety of Accessory Sets available.
- **Durable** . . . CP's quality construction and materials assure long life and top performance.

The CP-710 "Hi-Speed" Zip-Gun Hammer delivers 3500 bpm of rapid hammer action. It is designed for muffler, brake and body shop use. Provides the high speed needed for removal of exhaust systems, shock absorber nuts, brake drums, license bolts, panels, etc.

Specifications

Chisel Shank Opening	.401"
Net Weight	3¼ lbs
Overall Length	6¾"
Average Air Consumption	4 cfm
Air Inlet Thread Size	¼"
Recommended Hose Size	⅜"
BPM @ 100 psi	3500

CP-710 Hi-Speed Zip-Gun®

Includes:

A-046095 Quick Change Retainer
Shown with Body Shop Accessory Set No. CA-050214

Set Includes:

A-046050	Rivet Cutter
A-046054	# 8 Pierce Punch
A-046071	Twin Blade Cutter
A-046073	Cold Chisel
A-046075	Weld Splitter
A-046076	Edging Chisel
A-046078	Taper Punch
A-046092	Flanging Tool
A-046096	Bee-hive Retainer
CA-127020	Carry Case

See pages 36 through 45 for CP Accessories and other Accessory Sets.



Accessory Set A-050214

All applicable requirements of OSHA regulations can be met with this tool.

CP-714

"Hi-Power" Zip-Gun®

Check These Quality Features:

- **Heavy-hitting power** . . . delivers 2000 blows per minute to get the job done.
- **Precision control** . . . provided by the built-in power control and teasing action trigger.
- **Versatile** . . . used for cutting, ripping, bumping, shearing, scraping and practically anything else!
- **Streamlined design** . . . permits the CP-714 to get into tight places that hand tools just can't reach.

Use it for removing king pins, shackle pins, ball joints, universal joints, idler arm bushings, etc. Then try it on some other tough jobs—cutting, driving, punching—and let the CP-714 prove its worth! Valve control is so precise you can count the hammer blows at minimum setting! Excellent for delicate panel cutting!

Specifications

Chisel Shank Opening	.401"
Net Weight	3¼ lbs
Overall Length	7¾"
Average Air Consumption	4 cfm
Air Inlet	¼"
Recommended Hose Size	⅜"
BPM @ 100 psi	2000

CP-714 Hi-Power Zip-Gun®

Includes:

A-046095 Quick Change Retainer
Shown with Super Service Accessory Set No. A-050216

Set Includes:

A-046050	Rivet Cutter
A-046052	Bushing Splitter
A-046055	#10 Pierce Punch
A-046056	Bushing Driver
A-046057	Tie Rod Tool
A-046071	Twin Blade Cutter
A-046073	Cold Chisel
A-046074	Straight Punch
A-046077	Muffler Splitter
A-046078	Taper Punch
A-046096	Bee-hive Retainer
CA-127020	Carry Case

See pages 36 through 45 for CP Accessories and other Accessory Sets.



Accessory Set A-050216

CP-717

"Super-Power" Zip-Gun®

Check These Quality Features:

- **Rugged duty** . . . the Zip-Gun designed for front-end and similar heavy work.
- **Hard hitting power** . . . 1800 blows per minute for the tough jobs.
- **Controllable Power** . . . "Teasing Throttle" permits a range of impacts for all jobs—even slow enough to count them.
- **Durable** . . . Specifically designed for heavy cutting, ripping and driving year after year.

The "Super-Power" Zip-Gun is specifically designed and recommended for fleets and all shops doing heavy volume work. It is ideal for frame and front end shops specializing in large car and truck servicing, truck-body rebuilding shops, heavy-duty spring shops and salvage and wrecking-yard operations.

Specifications

Chisel Shank Opening	.498"
Net Weight	4¾ lbs
Overall Length	8½"
Average Air Consumption	7 cfm
Air Inlet	¼"
Recommended Hose Size	¾"
BPM @ 100 psi	1800

CP-717 Super-Power Zip-Gun®

Includes:


A-047095	Quick Change Retainer
CA-085203	Regulator

Shown with Heavy Duty Front End Accessory Set No. A-050207

Set Includes:

CA-047270	2' Leader Hose
CA-047300	Quick Coupler
CA-047302	Nipple
A-047052	Bushing Splitter
A-047059	1" Fork Tool
A-047071	Twin Blade Cutter
A-047073	Cold Chisel
A-047078	Taper Punch
A-047091	1½" Smoother
A-047096	Bee-hive Retainer
CA-127020	Carry Case

See pages 36 through 45 for CP Accessories and other Accessory Sets.

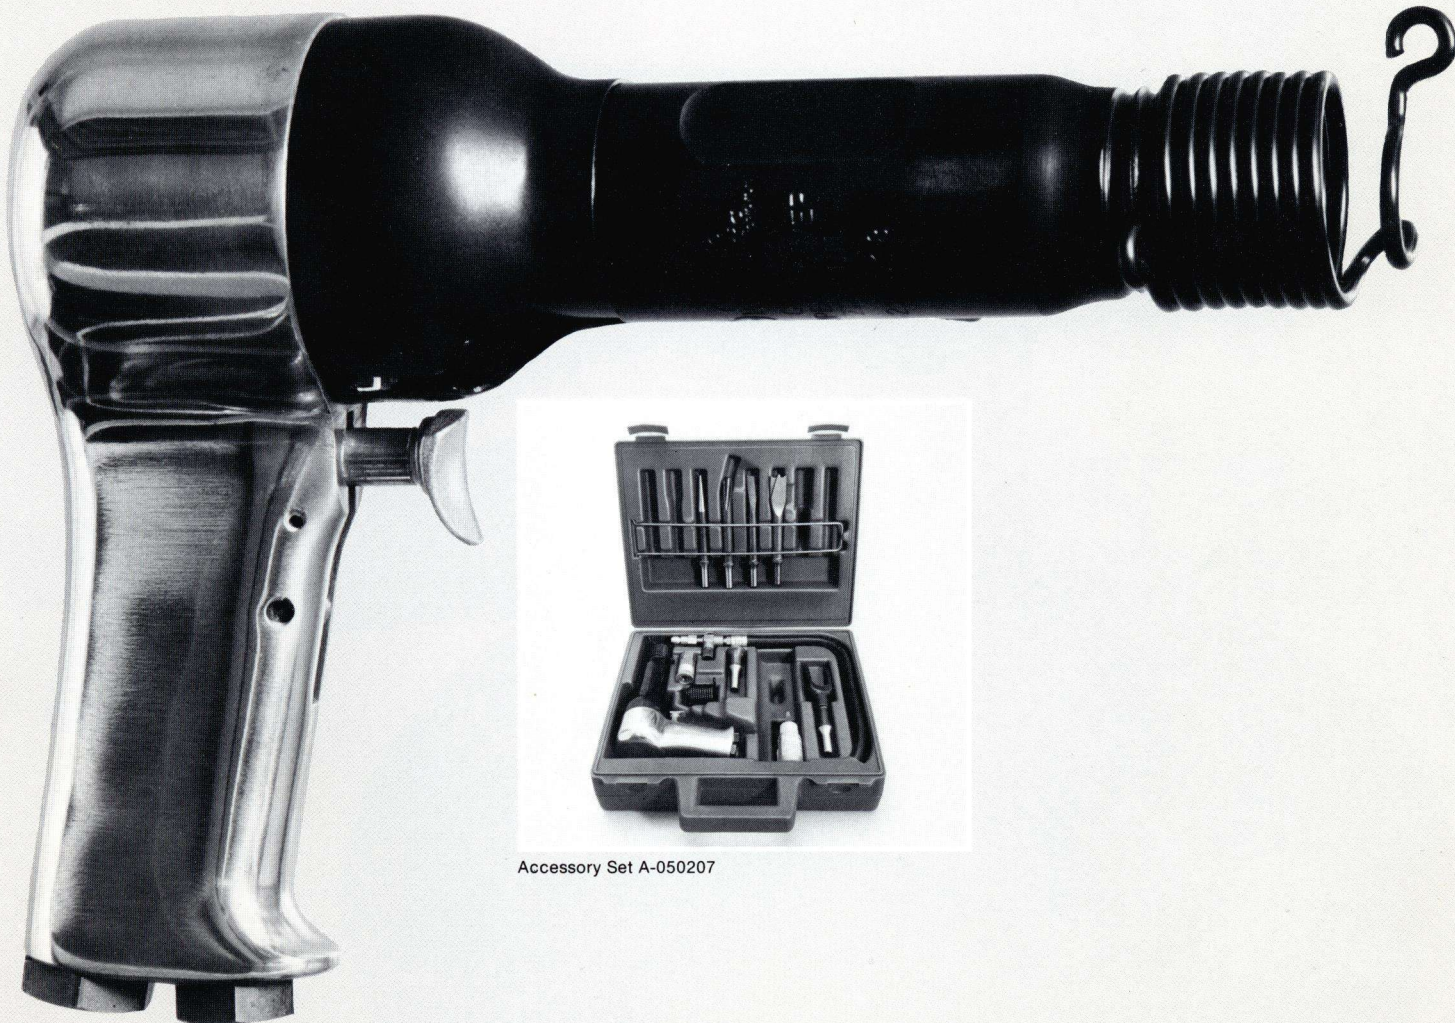

Accessory Set A-050207

All applicable requirements of OSHA regulations can be met with this tool.

CP-765S

Air-Powered Sander

CP-765S/G

Air-Powered Grinder

Check These Quality Features:

- **Featherweight** . . . outperforms electric models weighing far more.
- **Compact** . . . gets into hard-to-reach spots easily.
- **Air-powered** . . . no electrical shock hazard even under the wettest conditions.
- **Fine Speed Control** . . . "Teasing Throttle" control covers wide work range—from delicate feather-edging to full speed grinding!

The CP-765S has a variable power control which permits the operator a wide work range from delicate feather edging to full-speed grinding. It offers minimum speed loss even under heavy loads.

The CP-765S/G offers the same design and performance features as the CP-765S and includes a grinder head assembly with wheel and safety guard. It is the ideal heavy-duty abrasive tool for heavy grinding work.

Specifications

Capacity	9"
No-Load Speed	4500 rpm
Pad-Size—Combination	7" and 9"
Depressed Center Wheel Size	—
Spindle Size	5/8" x 11"
Overall Height	7"
Net Weight	4 lbs
Air Inlet Thread Size	1/4"
Recommended Hose Size	3/8"

CP-765S/G

Capacity	7"
No-Load Speed	4500 rpm
Pad-Size—Combination	—
Depressed Center Wheel Size	7"
Spindle Size	5/8" x 11"
Overall Height	7"
Net Weight	6 1/2 lbs
Air Inlet Thread Size	1/4"
Recommended Hose Size	3/8"

CP-765S Air-Sander includes:

7" and 9" Back-up Plates
Back-up Pad
Lock Nuts
24 Grit Disc

CP-765S/G Air-Sander/Grinder Set includes:

CP-765S Sander and Equipment
CA-048005 Grinder Head Assembly (wheel guard, spacers and 7" depressed center grinding wheel)

See pages 36 through 45 for other CP Accessories.



All applicable requirements of OSHA regulations can be met with these tools.

CP-788D

Air-Powered Drills

1/2" — 500 rpm and

3/8" — 2750 rpm

Check These Quality Features:

- **Compact** . . . lightweight design is easy to handle.
- **Rugged** . . . built for the ultimate in performance and dependability.
- **Heavy-duty** . . . 1/2 hp air motor won't stall or overheat.
- **Speed control** . . . with adjustable teasing action trigger.
- **Air diffuser** . . . exhausts air away from the work area.

The CP-788D-500 Air Drill is ideal for hole sawing, honing cylinders, and drilling chassis frames and trailer bodies. Precision cut, full hardened *double reduction* planetary gearing and ball bearing construction make this tool the ultimate in drills.

The CP-788D-2750 Air Drill is compactly designed for carbon removal, light body sanding, honing, buffing and drilling. Also with full bearing construction and precision cut, hardened planetary gearing, this drill is the finest general purpose drill on the market.

Specifications

	CP-788D-500	CP-788D-2750
Capacity	1/2"	3/8"
Net Weight	3 3/4 lbs	2 lbs
Overall Length	7 1/4"	6 1/2"
Jacobs® Chuck Size	1/2"	3/8"
RPM	500	2750
Average Air Consumption	4 cfm	4 cfm

CP-788D-500 Air Drill includes:

1/2" Jacobs® 3-Jaw Chuck and Key


Available as optional accessory.

CA-118482 Dead Handle Assembly


CP-788D-2750 Air Drill includes:

3/8" Jacobs® 3-Jaw Chuck and Key


See pages 36 through 45 for other CP Accessories.

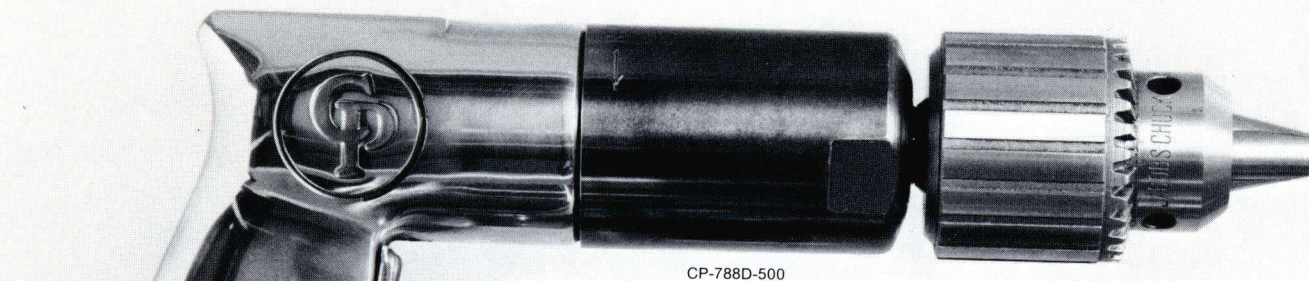

CP-788D-500

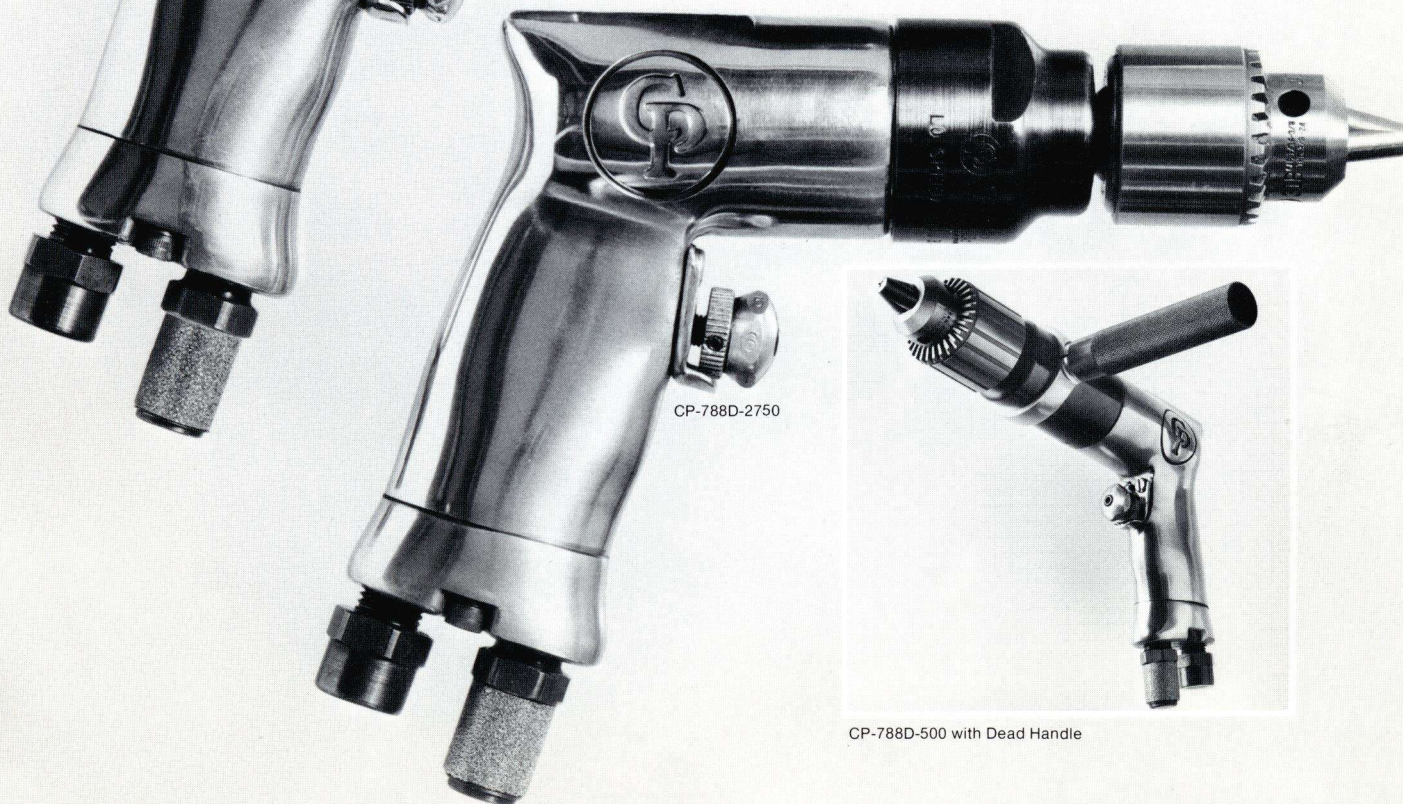

CP-788D-2750

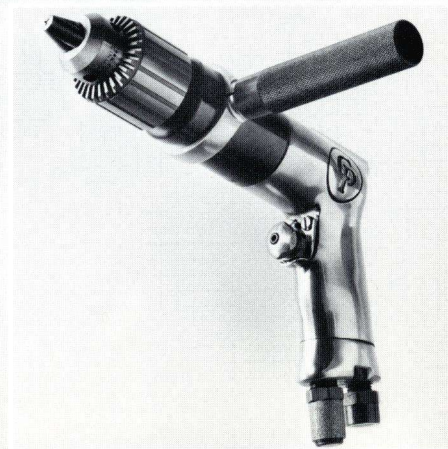

CP-788D-500 with Dead Handle

All applicable requirements of OSHA regulations can be met with these tools.

CP-705

Pneu-draulic™ Jacks

20 ton and 50 ton

Check These Quality Features:

The Pneu-draulic Jack is powered by the famous CP Pneu-draulic (air-powered hydraulic) Pump. Built-in overload protection. Develops rated capacity at air pressure of 100 pounds or more. Uses very little air . . . any 1 hp compressor will power it.

Is unequalled for all medium-to-heavy-duty vehicle lifting applications and for tire service truck use.

Specifications

	CP-705-20TC	CP-705-50TC
Capacity	20-ton	50-ton
Net Weight	66 lbs	116 lbs
Overall Length	50"	50"
Height of Jack (maximum)	19"	18"
Height of Jack (minimum)	9¾"	11¾"
Ram Travel	6¼"	6"

CP-705-20TC Cart-Mounted 20-ton Pneu-draulic Jack

CP-705-20T Pneu-draulic Pump and Jack includes:

7' Hydraulic Hose
Quick Coupler

CP-705-50TC Cart-Mounted 50-ton Pneu-draulic Jack

Also available:

CP-705-50T Pneu-draulic Pump and Jack includes:


7' Hydraulic Hose
Quick Coupler



CP-705-20T



CP-705-50TC

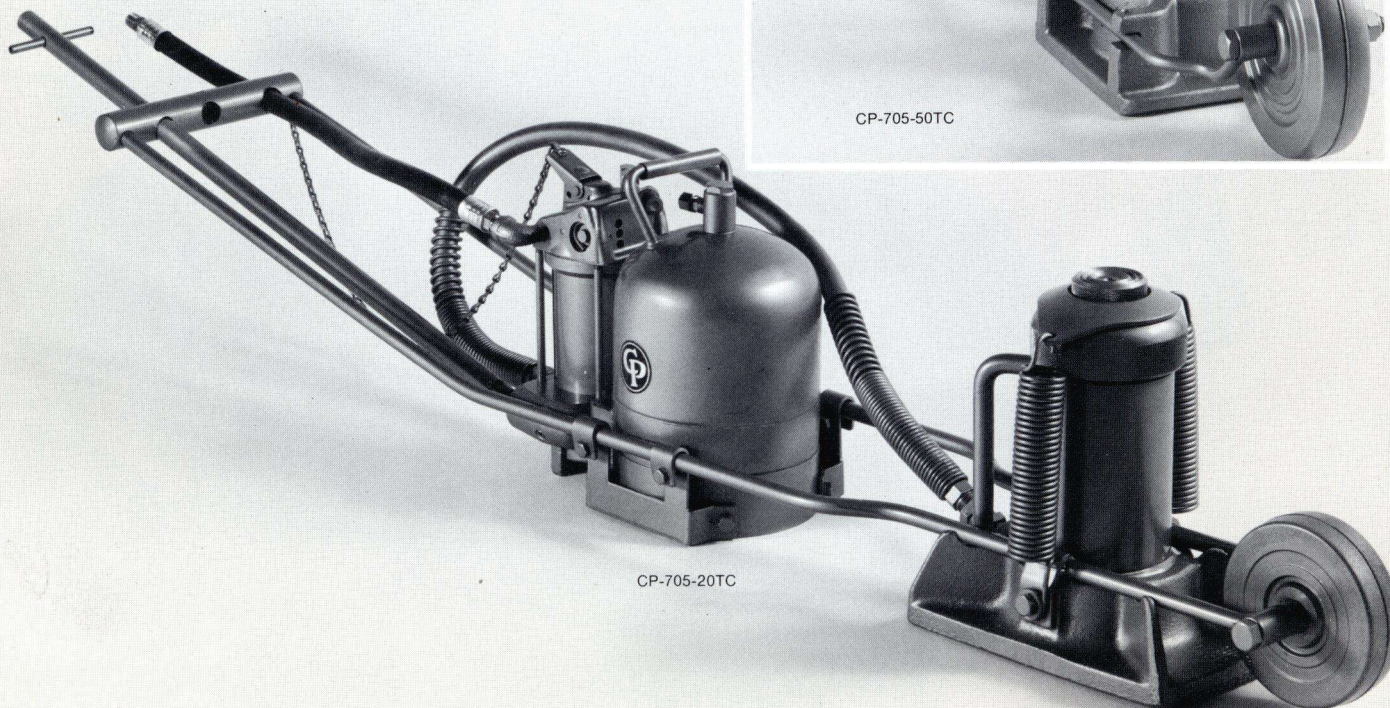

CP-705-20TC

All applicable requirements of OSHA regulations can be met with these tools.

CP-705

Pneu-draulic™ Pumps

"Hydraulic Pressure from an Air Hose"

CP-705 Pneu-draulic Pumps are air-powered hydraulic units designed to operate hydraulic presses, jacks and most single-acting hydraulic cylinders and rams.

Specifications for all CP-705 Pumps

Hydraulic Pressure Output:

CP-705—16 series	8000 psi
CP-705—38 series	4000 psi
Weight (Less Oil)	16½ lbs
Tank Capacity (173.25 cu. in.)	3 qts
Recommended Air Pressure	100 psi*
Recommended Air Hose	¾"
Air Inlet Thread Size	¼"
Oil Outlet Thread Size	¾"

*NOTE: Pumps develop rated capacity at 100 psi.

CP-705-16H Pneu-draulic Pump with Manual Release includes:

7' Oil Hose
Oil Hose Coupler
Pressure Safety Valve (factory-set at 8000 psi)

Also available:

CP-705-38 Pneu-draulic Low Pressure Pump with Manual Release includes:


Pressure Safety Valve (factory-set at 4000 psi for increased oil flow)

CP-705-16ARH Pneu-draulic Pump with Automatic Release includes:

7' Oil Hose
Oil Hose Coupler
Pressure Safety Valve (factory-set at 8000 psi)

Unit can be set for Automatic or Manual operation by turning convenient automatic release valve.

All applicable requirements of OSHA regulations can be met with this tool.

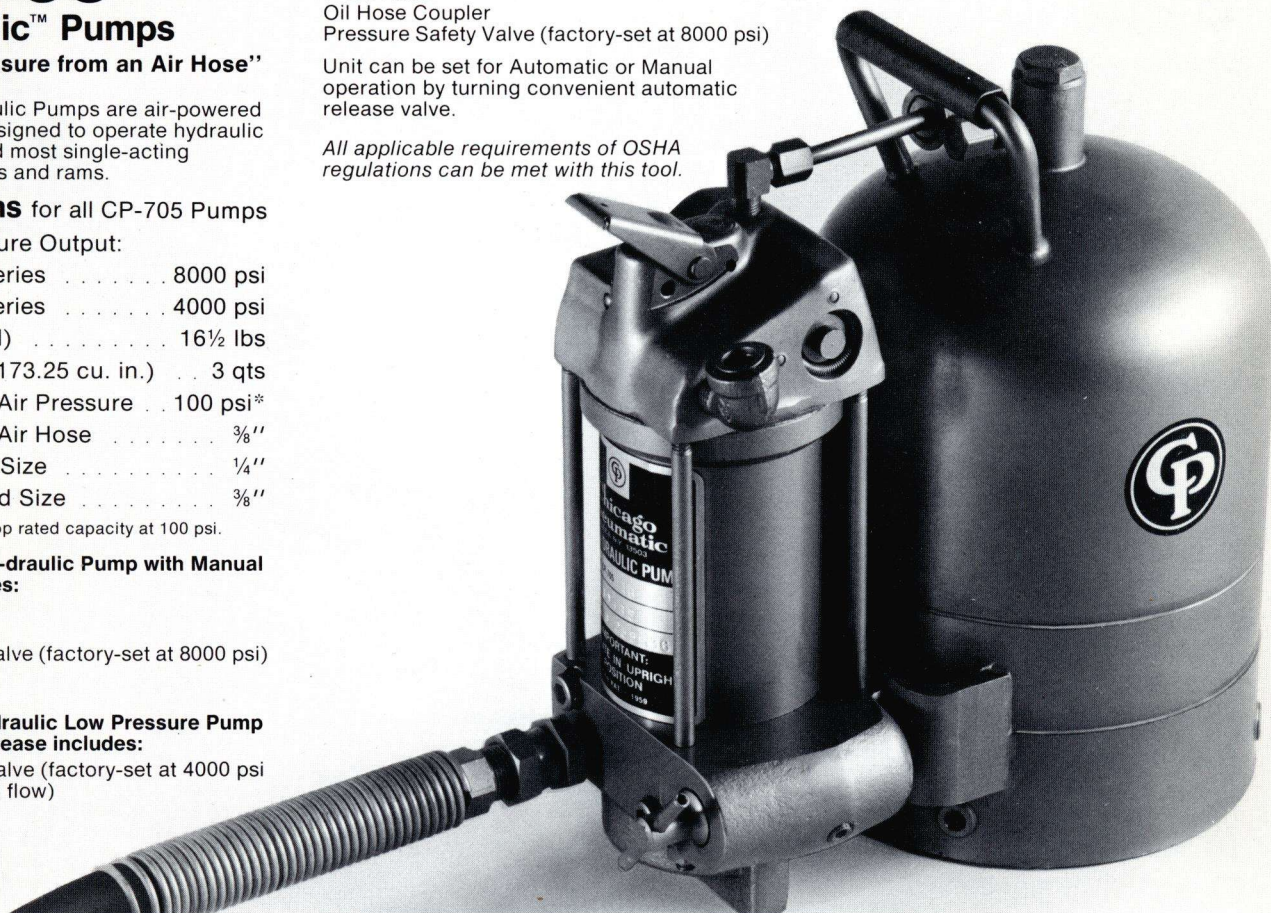

CP-701

Liqui-Flate™ Fluid Ballast Pump

"Pump Calcium Chloride and other fluids quickly and easily."

Lightest, most rugged and compact unit ever offered for liquid ballasting tractor and off-the-road equipment tires!

The Liqui-Flate™ Pump is air-powered—operates anywhere from service truck or shop compressor. No danger of electric shock! Fills and evacuates tires fast... automatically protects against over-inflation. Streamlined case is genuine Owens-Corning FIBERGLAS®—stronger than steel... hard knocks can't damage it.

Specifications

Capacity: Fill	10 gpm
Evacuate	6 gpm
Net Weight	22½ lbs
Length	16"
Width	8⅞"
Height	10"
Air Consumption	14 cfm
Air Inlet Thread Size	¼"
Minimum Hose Size	¾"

CP-701 Liqui-Flate Fluid Ballast Pump includes:

Two 10' lengths of ¾" ID Hose
Valve Core Ejector
Bronze Strainer
Couplers



All applicable requirements of OSHA regulations can be met with this tool.

CP-828

3/8" Speed-Ratchet™ Wrench

Check These Quality Features:


- Powerful . . . over 45 ft-lbs of torque!
- Quick run-down . . . 150 rpm!
- Lightweight . . . only 42 ounces!
- Low air consumption!
- Full bearing construction in motor and gears!
- Precision machined . . . full hardened gearing!
- Improved ratchet head design for added durability!
- Ball-type socket retainer for fast, easy socket changing!

Specifications

Capacity (Bolt Size)	3/8"
Net Weight	2 5/8 lbs
Length	10"
Speed	150 rpm
Torque Range	0-45 ft-lbs
Avg. Air Consumption	4 cfm
Air Inlet	1/4"
Recommended Hose Size	3/8"

See pages 36 through 45 for CP Accessories and other Accessory Sets.

All applicable requirements of OSHA regulations can be met with this tool.

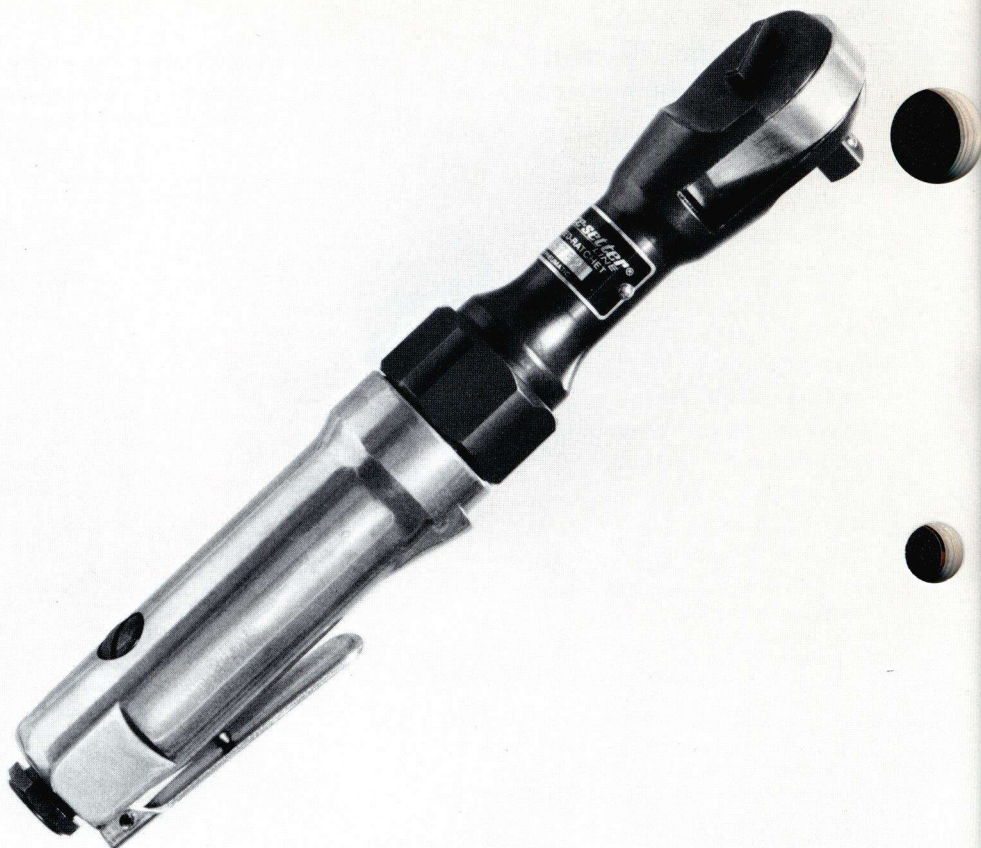

CP-820

3/8" Air-Wrench

Check These Quality Features:


- CP-engineered single-blow, double cam clutch delivers "palm-size" power!
- Convenient, fast-action lever throttle!
- Built-in air regulator!
- Exclusive supported ring socket retainer . . . an original CP design!
- Chrome-plated aluminum end plates for long, trouble-free service!

Specifications

Capacity (Bolt Size)	3/8"
Net Weight	2 3/8 lbs
Overall Length	6 1/4"
Average Air Consumption	3 cfm
Air Inlet	1/4"
Recommended Hose Size	3/8"
Free Speed	14,000 rpm
Ult. Torque @ 100 psi	70 ft-lbs

See pages 36 through 45 for CP Accessories and other Accessory Sets.

All applicable requirements of OSHA regulations can be met with this tool.

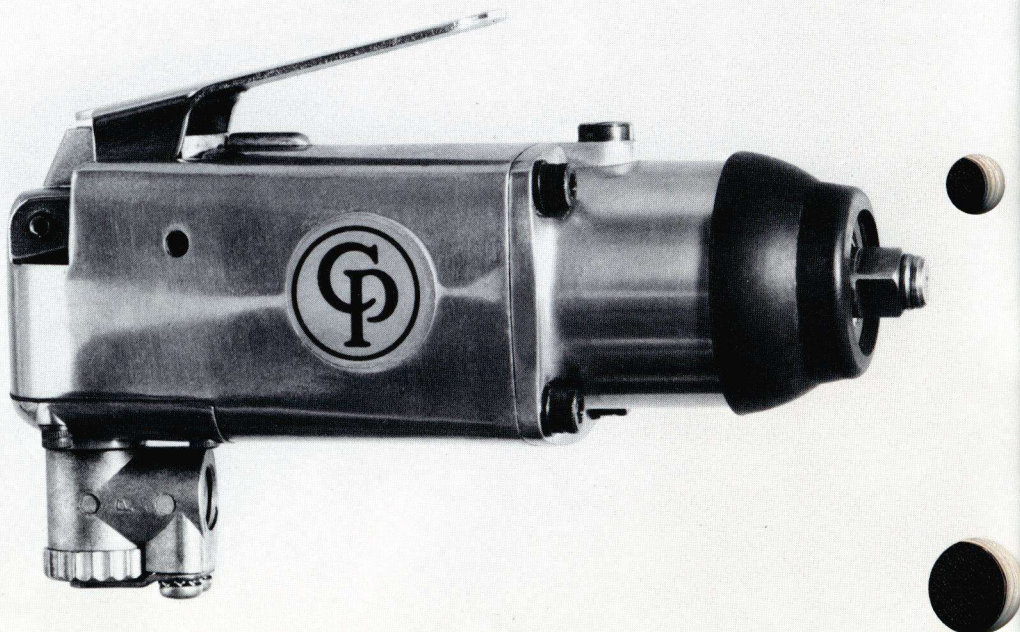

CP-821

3/8" Air-Wrench

Check These Quality Features:

- CP-engineered clutch delivers more power per pound with rugged single blow, double cam mechanism!
- Built-in air regulator for power control!
- Hard chrome-plated aluminum end plates for minimum weight and long, trouble-free service!
- Hardened steel reverse valve!
- Exclusive supported ring socket retainer . . . an original CP design!

Specifications

Capacity (Bolt Size)	3/8"
Net Weight	2 1/2 lbs
Overall Length	5 3/4"
Average Air Consumption	2 1/2 cfm
Air Inlet	1/4"
Recommended Hose Size	3/8"
Ult. Torque @ 100 psi	70 ft-lbs

See pages 36 through 45 for CP Accessories and other Accessory Sets.

All applicable requirements of OSHA regulations can be met with this tool.



CP-834

1/2" Air-Wrench

Check These Quality Features:

- CP patented and exclusive **Dyna-Pact*** clutch delivers high torque, more power-per-pound!
- Chrome-plated aluminum end plates for long, trouble-free service!
- One-piece housing is streamlined . . . maintains accurate alignment of all parts!
- Perfectly balanced for less operator fatigue!
- Supported ring socket retainer . . . an original CP design!

*U.S. Patent No. 3174597

Specifications

Capacity (Bolt Size)	1/2"
Net Weight	4 3/4 lbs
Overall Length	6 1/4"
Average Air Consumption	3 1/2 cfm
Air Inlet	1/4"
Recommended Hose Size	3/8"
Free Speed	8500 rpm
Ult. Torque @ 100 psi	275 ft-lbs

See pages 36 through 45 for CP Accessories and other Accessory Sets.

All applicable requirements of OSHA regulations can be met with this tool.



CP-872

3/4" Air-Wrench

Check These Quality Features:

- Lightweight . . . only 9 1/2 lbs!
- Durable, CP-engineered single-blow double-cam clutch!
- High torque air motor delivers more power-per-pound!
- Low air consumption!
- Long-wearing bronze end plates!
- Supported ring socket retainer . . . an original CP design!
- Built-in air regulator!

Specifications

Capacity (Bolt Size)	3/4"
Net Weight	9 1/2 lbs
Overall Length	8"
Average Air Consumption	8 cfm
Air Inlet	1/4"
Recommended Hose Size	3/8"
Free Speed	5000 rpm
Ult. Torque @ 100 psi	500 ft-lbs

See pages 36 through 45 for CP Accessories and other Accessory Sets.



All applicable requirements of OSHA regulations can be met with this tool.

CP-897-6

1" Air-Wrench


Check These Quality Features:

- Heavy duty design for tire work on trucks and other heavy equipment!
- Equipped with 6" extended shank for recessed tire rims!
- Ultimate torque @ 100 psi is 1350 ft-lbs!
- Supported ring socket retainer makes socket changing quick and easy!
- Quality construction and materials assure long tool life!
- Handles the toughest job effortlessly!
- Optional . . . CP-897 is available with short shank!

Specifications

Drive	1" Square
Capacity (Std. Bolt Size)	1 1/4"
Net Weight	29 3/4 lbs
Overall Length	15 3/4"
Average Air Consumption	12 cfm
Air Inlet	1/2"
Minimum Hose Size	1/2"
Ultimate Torque @ 100 psi	1350 ft-lbs

See pages 36 through 45 for CP Accessories and other Accessory Sets.

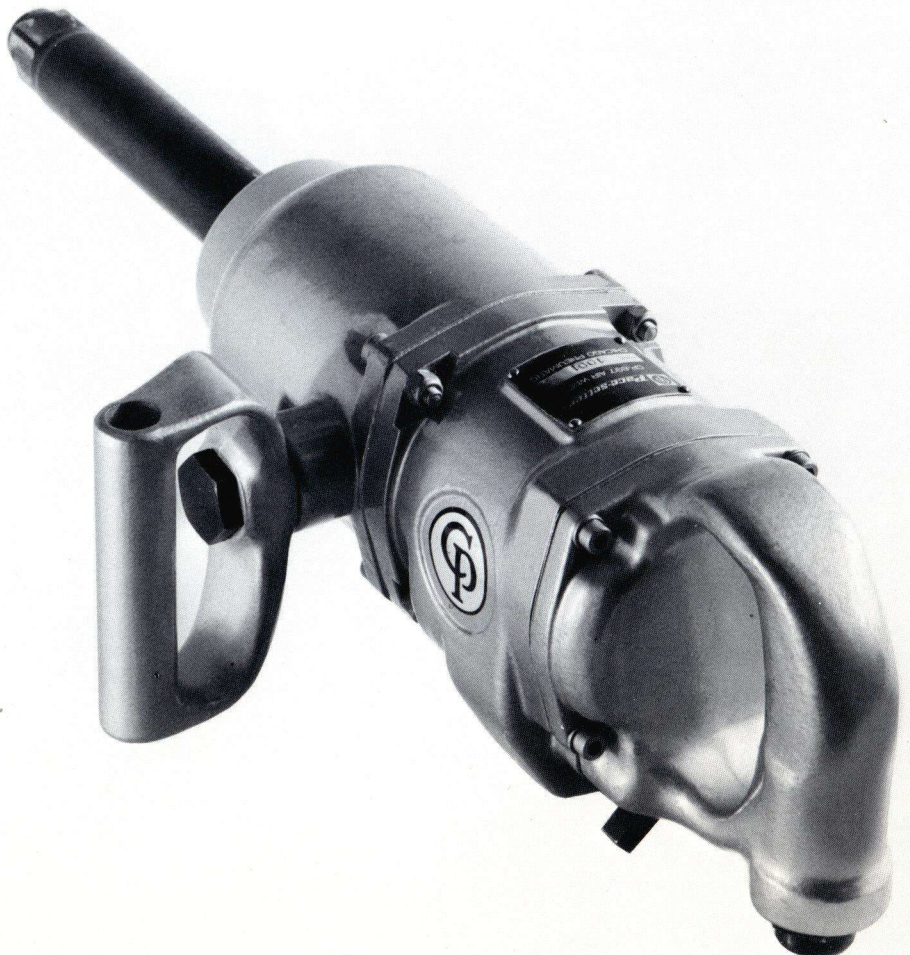

All applicable requirements of OSHA regulations can be met with this tool.

CP-867

Straight Line Sander


Check these Quality Features:

- Steel cylinder liner and steel rack for long, trouble-free service!
- Double-ended dual-action piston means vibration-free performance . . . handles "feather edging" with ease!
- Up to 3000 reciprocating strokes per minute . . . eliminates "swirl" marks!
- Powerful one-inch stroke minimizes grinding operations!
- Paper size of 2 3/4" x 17 1/2" means over 40 square inches of working area!

Specifications

Net Weight	6 1/4 lbs
Paper Size	2 3/4" x 17 1/2"
Free Speed	Up to 3000 strokes/min
Reciprocating Stroke	1"
Recommended Air Pressure	65 to 90 psi
Recommended Hose Size	3/8"

See pages 36 through 45 for CP Accessories.

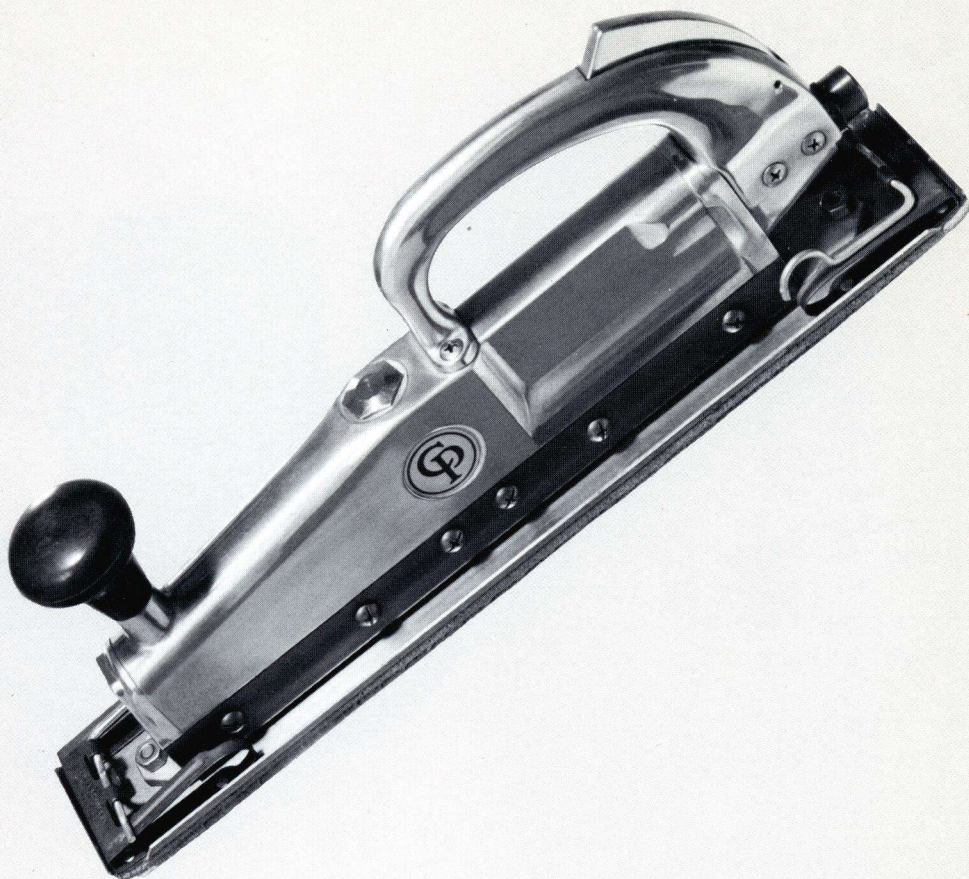

All applicable requirements of OSHA regulations can be met with this tool.

CP-863

Random Orbital Sander

Check these Quality Features:

- Tough Du Pont Zytel® nylon handle is durable, light!
- Built-on air regulator for positive power control!
- Ideal for feather edging, wet and dry sanding, blocking of primer surface, general refinishing of metal, plastic, wood!
- For best results operate tool at 60 psi.

Specifications

Pad Capacity	6"
Net Weight	2 1/2 lbs
Overall Height	5 3/4"
Free Speed	10,000 rpm
Recommended Air Pressure	50 to 75 psi
Recommended Hose Size	3/8"

See pages 36 through 45 for CP Accessories.



All applicable requirements of OSHA regulations can be met with this tool.

CP-864

Random Orbital Sander


Check these Quality Features:

- Counterweight balance for smooth, comfortable operation . . . assures a "swirl-free" finish!
- Orbital or rotary action!
- Sure-grip contoured handle!
- Built-in air regulator varies speed to suit the job!
- Steel end plates for long tool life!
- Circular exhaust diffuses air flow!

Specifications

Net Weight	4 lbs
Pad Size	6"
Free Speed	10,000 rpm
Orbital Stroke	$\frac{3}{16}$ "
Recommended Air Pressure	50 to 75 psi
Recommended Hose Size	$\frac{3}{8}$ "

See pages 36 through 45 for CP Accessories.

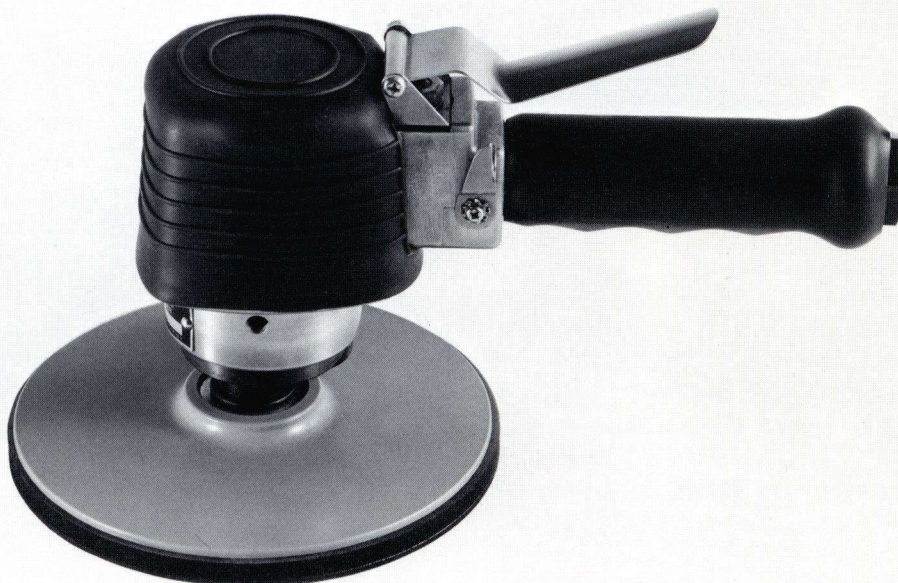

All applicable requirements of OSHA regulations can be met with this tool.

CP-866

Orbital Sander

Check these Quality Features:

- Ball bearing construction—dynamically balanced for vibration-free performance!
- $\frac{3}{16}$ " total orbit stroke gives swirl-free finish!
- Steel end plates for longer life!
- Muffled rear exhaust for quiet operation!
- Positive paper-locking clips!
- Built-in air regulator!
- Long-lasting urethane oil resistant pad!
- Free speed . . . 8000 rpm.

Specifications

Net Weight	4 $\frac{3}{4}$ lbs
Paper Size	3 $\frac{3}{8}$ " x 9"
Free Speed	8000 rpm
Orbital Stroke	$\frac{3}{16}$ "
Recommended Air Pressure	50 to 75 psi
Recommended Hose Size	$\frac{3}{8}$ "

See pages 36 through 45 for CP Accessories.



All applicable requirements of OSHA regulations can be met with this tool.

CP-859

Orbital Sander


Check these Quality Features:

- Built-in speed regulator—varies speed to suit job!
- Steel end plates—for long life!
- $\frac{3}{16}$ " orbital action—gives scratch-free, groove-free finish!
- All ball bearing construction—means vibration-free operation!
- Lightweight—only 5 $\frac{3}{8}$ lbs!
- Paper size of 2 $\frac{3}{4}$ " x 17 $\frac{1}{2}$ " means over 40 square inches of working area!
- Free speed . . . 8000 rpm.

Specifications

Net Weight	5 $\frac{3}{8}$ lbs
Paper Size	2 $\frac{3}{4}$ " x 17 $\frac{1}{2}$ "
Free Speed	8000 rpm
Orbital Stroke	$\frac{3}{16}$ "
Recommended Air Pressure	50 to 75 psi
Recommended Hose Size	$\frac{3}{8}$ "

See pages 36 through 45 for CP Accessories.

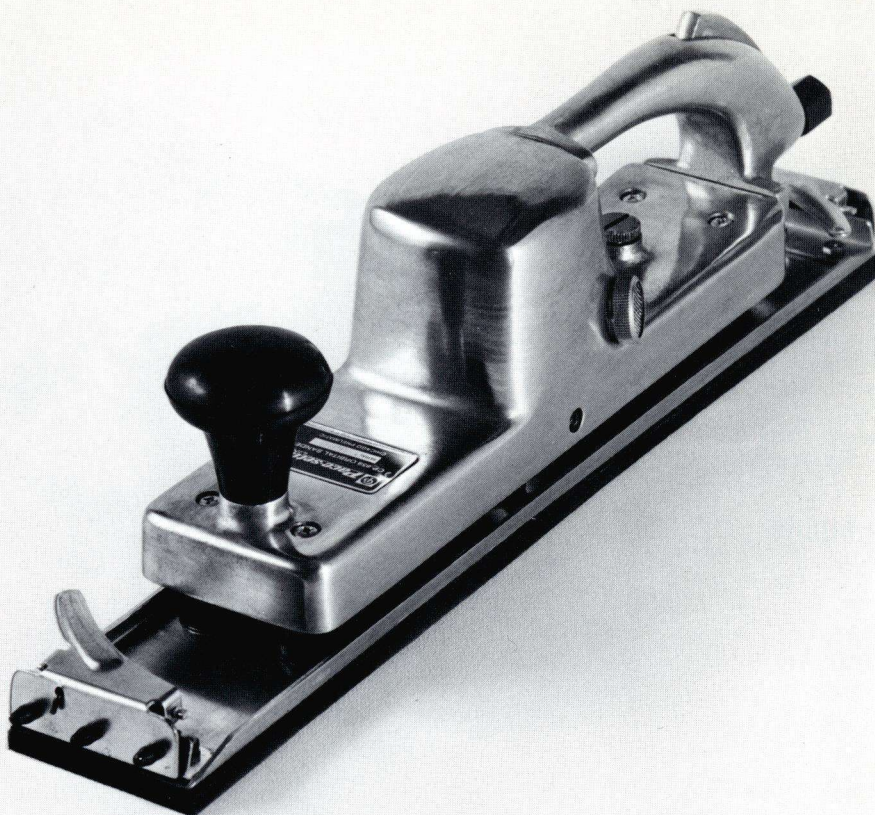

All applicable requirements of OSHA regulations can be met with this tool.

CP-865

Vertical Sander

Check these Quality Features:

- Extra heavy-duty gearing for extra heavy-duty operation!
- Powerful—1 hp motor for sanding!
- Compact—gets into hard-to-reach spots!
- Variable power control—permits delicate feather edging to full-speed grinding!
- Lightweight—less operator fatigue!
- Anti-friction ball bearing construction for vibration-free performance!
- 7" sturdy phenolic pad!
- Muffled handle exhaust for quiet operation!
- Free speed . . . 5000 rpm.

Specifications

Capacity	7"
Net Weight	4 $\frac{1}{2}$ lbs
Free Speed	5000 rpm
Spindle Size	$\frac{5}{8}$ " x 11"
Height	7 $\frac{1}{2}$ "
Maximum HP	1
Air Inlet	$\frac{1}{4}$ "
Recommended Hose Size	$\frac{3}{8}$ "

See pages 36 through 45 for CP Accessories.



All applicable requirements of OSHA regulations can be met with this tool.

CP-869P

Angle Polisher

Check These Quality Features:

- Powerful 1 hp motor for heavy duty polishing!
- Muffled rear exhaust for quiet operation!
- Built-in air regulator . . . for speed control!
- Ball bearing construction for long life!
- Lightweight . . . only 6½ lbs!
- Hardened and ground spiral beveled gears for smooth, vibration-free performance!
- Contoured throttle control for easy handling!
- High quality "flex-edge" polishing pad for higher rpm without burning paint!

Specifications

Capacity	8" Pad
Net Weight	6½ lbs
Free Speed	2400 rpm
Spindle Size	5/8" x 11"
Overall Length	16"
Maximum HP	1
Air Inlet	1/4"
Recommended Hose Size	3/8"
Recommended Operating Pressure	100 psi

See pages 36 through 45 for CP Accessories and other Accessory Sets.

All applicable requirements of OSHA regulations can be met with this tool.



CP-869

Angle Sander

Check These Quality Features:

- Powerful 1 hp motor for sanding!
- Contoured throttle control!
- Built-in air regulator!
- Lightweight—only 6½ lbs!
- Quality spiral beveled gears for long life!
- Ball bearing construction for vibration-free performance!
- 7" sturdy phenolic pad!
- Muffled rear exhaust for quiet operation!

Specifications

Capacity	7"
Net Weight	6½ lbs
Free Speed	4500 rpm
Spindle Size	5/8" x 11"
Length	16"
Maximum HP	1
Air Inlet	1/4"
Recommended Hose Size	3/8"

See pages 36 through 45 for CP Accessories and other Accessory Sets.



All applicable requirements of OSHA regulations can be met with this tool.

CP-860R

Rear Exhaust Die Grinder

Check These Quality Features:

- Rear exhaust is designed to direct air flow away from work area!
- Fast, vibration-free performance delivered at 22,000 rpm!
- Rugged air motor delivers over ½ horsepower!
- Lightweight—only 20 ounces!
- Built-in speed regulator provides the versatility to suit the job!
- Full ball bearing construction and steel end plates assure long tool life!

Specifications

Collet Size	1/4"
Net Weight	1 1/4 lbs
Overall Length	5 3/4"
Side to Center Distance	1 3/16"
Free Speed	22,000 rpm
Air Inlet	1/4"

Optional:

Rear Exhaust System CA-127175

Includes:

- 6' whip Hose CA-046270
- 5' Exhaust Overhose CA-127173
- Overhose Attachment Ferrule CA-127174

See pages 36 through 45 for CP Accessories and other Accessory Sets.

All applicable requirements of OSHA regulations can be met with this tool.



CP-861

High-Speed Sander

Check These Quality Features:

- Tough Du Pont Zytel® nylon handle is durable, light!
- High-speed, vibration-free motor!
- Trigger control valve provides variable speeds from 500 to 22,000 rpm!
- Ideal for touch-up, feather edging and sanding!
- Fast and easy finishing of flat and contoured surfaces!

Specifications

Pad Capacity	6"
Net Weight	2 1/2 lbs
Overall Height	4 3/4"
Free Speed	22,000 rpm
Recommended Air Pressure	50 to 75 psi
Recommended Hose Size	3/8"

See pages 36 through 45 for CP Accessories.



All applicable requirements of OSHA regulations can be met with this tool.

CP-884

3/8" Air-Drill


Check these Quality Features:

- Powerful, stall-free 1/2 horsepower motor!
- Full ball and needle bearing construction!
- Steel end plates for long tool life!
- Precision Jacobs® 3/8" drill chuck!
- Small and compact . . . just 6 1/4" long!
- Lightweight . . . only 36 ounces!
- Low air consumption!

Specifications

Capacity	3/8"
Net Weight	2 1/4 lbs
Overall Length	6 1/4"
Free Speed	2800 rpm
Average Air Consumption	4 cfm
Recommended Hose Size	3/8"

See pages 36 through 45 for CP Accessories and other Accessory Sets.

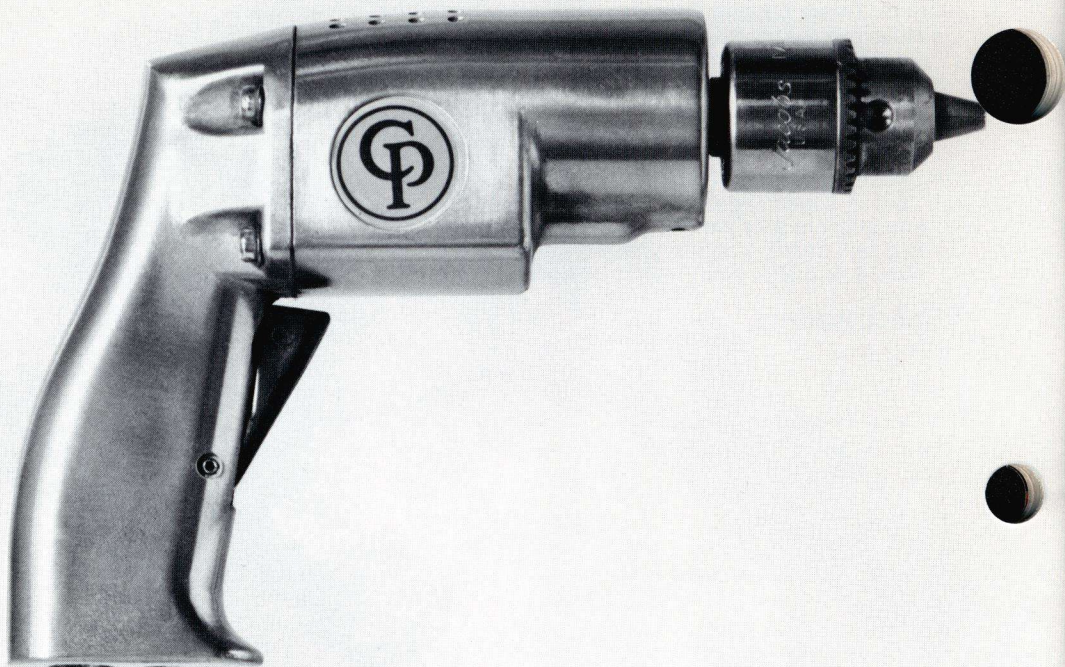

All applicable requirements of OSHA regulations can be met with this tool.

CP-888

3/8" Air-Drill


Check these Quality Features:

- Powerful stall-free 1/2 horsepower motor!
- Full ball and needle bearing construction!
- Precision Jacobs® 3/8" drill chuck!
- Lightweight—only 2 lbs!
- Built-in air regulator!
- Chrome-plated end plates for long life!
- Muffled handle exhaust for quiet operation!

Specifications

Capacity	3/8"
Net Weight	2 lbs
Overall Length	6 1/2"
Free Speed	2100 rpm
Average Air Consumption	4 cfm
Recommended Hose Size	3/8"

See pages 36 through 45 for CP Accessories and other Accessory Sets.

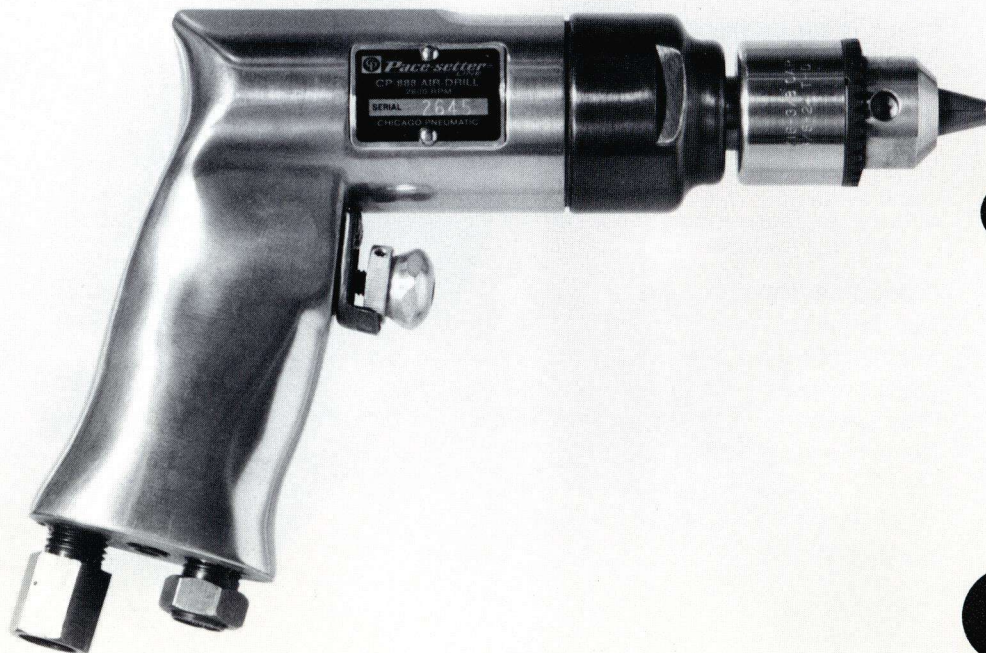

All applicable requirements of OSHA regulations can be met with this tool.

CP-809

Zip-Gun®

Check These Quality Features:

- Tough Du Pont Zytel® nylon handle is durable, light!
- Spring retainer makes chisel changing quick and easy!
- Tool's short piston stroke and fast hammer action are ideally suited for all light and medium duty applications!
- Speeds removal of muffler and exhaust systems!
- Makes panel cutting fast, easy and accurate!
- Popular .401" shank size.

Specifications

Chisel Shank Opening	.401"
Net Weight	2¾ lbs
Overall Length	5½"
Blows per Minute	4800
Air Inlet	¼"
Recommended Hose Size	⅜"

See pages 36 through 45 for CP Accessories and other Accessory Sets.

All applicable requirements of OSHA regulations can be met with this tool.



A. J. Foyt Jr.

Tool Up with CP
worth the difference

CP Accessories—Air-Wrench Accessory Sets

$\frac{3}{8}$ " Air-Wrenches and Ratchets

Part No.	Description	Accessory Set Numbers			
		CA-050220	CA-050222	CA-050223	CA-050228
CA-046126	Spark Plug Skt.				X
CA-046200	Magnetic Bit Holder		X		
CA-046201	# 1 Phillips Bit		X		
CA-046202	# 2 Phillips Bit		X		
CA-046203	# 3 Phillips Bit		X		
CA-046251	Angle Head	X	X		
CA-046270	6' Leader Hose				X
CA-046346	Socket Set	X	X	X	X
CA-046380	3" Extension		X	X	X
CA-046386	Univ. Joint		X	X	
CA-047270	Leader Hose			X	
CA-047300	Nipple			X	
CA-047302	Quick Coupler			X	
CA-127018	Carry Case	X	X	X	
CA-127021	Carry Case				X

Selection Guide for Accessory Sets

Set No.	CP TOOLS						
	720	721	723	728	820	821	828
CA-050220	X	X			X	X	
CA-050222	X	X			X	X	
CA-050223	X	X	X		X	X	
CA-050228				X			X

$\frac{1}{2}$ " Air-Wrenches

Part No.	Description	Accessory Set Numbers			
		CA-050233	CA-050241	CA-050242	CA-050244
CA-047253	Angle Head		X		
CA-047270	2' Leader Hose	X		X	
CA-047273	50', $\frac{3}{8}$ " Air Hose	X		X	
CA-047300	Quick Coupler	X		X	
CA-047302	Nipple	X		X	
CA-047346	Socket Set	X	X		X
CA-047347	Socket Set			X	
CA-127019	Carry Case	X	X	X	X

Selection Guide for Accessory Sets

Set No.	CP TOOLS								
	734	734-2	740	740-2	744	751	751-2	834	834-2
CA-050233	X	X	X	X	X	X	X	X	X
CA-050241	X		X						
CA-050242	X	X	X	X	X	X	X	X	X
CA-050244	X	X	X	X	X	X	X	X	X

CP Accessories—Air-Wrench Accessory Sets

3/4", 1" and # 5 Spline Drive

Part No.	Description	Accessory Set Numbers				
		CA-050175	CA-050190	CA-050191	CA-050194	CA-050195
CA-046156	Socket Set (# 5 spline dr.)		X			
CA-047270	2' Leader Hose	X				
CA-047300	Quick Coupler	X				
CA-047302	Nipple	X				
CA-048380	6" Extension Bar	X				
CA-049270	2' Leader Hose		X	X	X	X
CA-049272	50' Air Hose			X	X	
CA-049301	Quick Coupler		X	X	X	X
CA-049304	Nipple		X	X	X	X
CA-049380	6" Extension Bar (square)					X
CA-050382	8" Extension Bar (spline)		X			
CA-050438	Socket Set (# 5 spline dr.)				X	
CA-054365	Socket Set (3/4" sq. dr.)	X				
CA-057502	Socket Set (1" sq. dr.)					X
CA-085982	Metal Socket Box	X	X	X	X	X
CA-096160	Socket Set (1" sq. dr.)			X		

Selection Guide for Accessory Sets

Set No.	CP TOOLS											
	772	791-6	791SP-6	793SH	793SH-6	796	796SP	797	797SP	872	897	897-6
CA-050175	X									X		
CA-050190			X				X		X			
CA-050191		X		X	X	X		X			X	X
CA-050194			X				X		X			
CA-050195		X		X	X	X		X			X	X

CP Accessories—Sockets

Square Drive (inches)	Socket Size Across Flats (inches)	Hex. Std. Socket Part No.	Hex. Deep Socket Part No.	Deep Socket Length (inches)	Square Standard Socket Part No.	Special Socket Part No.	
3/8	3/8	CA-046012	—	—		CA-046126 Spark Plug Socket 1 3/16" hex.	
	7/16	CA-046014	—	—			
	1/2	CA-046016	CA-046116	1 1/2			
	9/16	CA-046018	CA-046118	1 1/2			
	5/8	CA-046020	CA-046120	1 1/2			
	1 1/16	CA-046022	CA-046122	1 1/2			
1/2	3/8	CA-047012	—	—	—	CA-047326 1/2" Drive Flip Socket 3/4" to 1 3/16" hex.	
	7/16	CA-047014	—	—	—		
	1/2	CA-047016	CA-047116	3 1/4			
	9/16	CA-047018	CA-047118	3 1/4			
	5/8	CA-047020	CA-047120	3 1/4			
	1 1/16	CA-047022	CA-047122	3 1/4			
	3/4	CA-047024	CA-047124	3 1/4			
	1 3/16	CA-047026	CA-047126	3 1/4			
	7/8	CA-047028	CA-047128	3 1/2		CA-047327 # 2 Spline Drive Flip Socket 3/4" to 1 3/16" hex.	
	1 5/16	CA-047030	CA-047130	3 1/2			
	1	CA-047032	CA-047132	3 1/2			
	1 1/16	CA-047034	—	—			
	1 1/8	CA-047036	—	—			
	3/4	CA-048024	CA-048124	3 1/4	†CA-048225 Std. †CA-048226 Deep		Thin-Wall Hex.
1 3/16	CA-048026	CA-048126	3 1/4				
7/8	CA-048028	CA-048128	3 1/2	*CA-048328			
1 5/16	CA-048030	CA-048130	3 1/2	*CA-048330			
1	CA-048032	CA-048132	3 1/2	*CA-048332			
1 1/16	CA-048034	CA-048134	3 1/2	*CA-048334			
1 1/8	CA-048036	CA-048136	3 1/2	*CA-048336			
1 3/16	—	†CA-048138	3 1/2	—			
1 1/4	CA-048040	CA-048140	3 1/2	*CA-048340			
1 5/16	CA-048042	CA-048142	3 1/2	CA-048326 3/4" Flip Socket 1 1/16" to 1 1/4" hex.			
1 3/8	CA-048044	—	—				
1 7/16	CA-048046	—	—				
1 1/2	†CA-048048	†CA-048348	5				
1	1 3/16	—	—			—	†CA-049226 Std.
	7/8	CA-049028	—		—	—	
	1 5/16	CA-049030	—	—	†CA-049230 Std.		
	1	CA-049032	—	—			
	1 1/16	CA-049034	CA-049134	3			
	1 1/8	CA-049036	CA-049136	3			
	1 3/16	†CA-049038	†CA-049138	3			
	1 1/4	CA-049040	CA-049140	3			
	1 5/16	CA-049042	CA-049142	3 1/2			
	1 3/8	CA-049044	—	—			
	1 7/16	CA-049046	—	—			
	1 1/2	†CA-049048	†CA-049148	3 1/2			
	1 1/2	—	†CA-049348	5			
	1 5/8	CA-049052	CA-049152	3 1/2			
	1 3/4	†CA-049056	†CA-049156	3 3/8			
	1 13/16	CA-049058	—	—			

†Budd Wheel Sockets
*Budd Rim Sockets

CP Accessories—Sockets

Spline Drive (#)	Socket Size Across Flats (inches)	Hex. Std. Socket Part No.	Hex. Deep Socket Part No.	Deep Socket Length (inches)	Square Standard Socket Part No.	Special Socket Part No.
# 4	—	—	—	—	—	Thin-Wall Hex.
	$\frac{1}{8}$	—	—	—	†CA-048227 Deep	—
	$\frac{7}{8}$	CA-048029	—	—	—	*CA-048329
	$\frac{1}{4}$	CA-048031	CA-048131	$3\frac{1}{2}$	—	*CA-048331
	1	CA-048033	—	—	—	*CA-048333
	$1\frac{1}{8}$	CA-048035	CA-048135	$3\frac{1}{2}$	—	*CA-048335
	$1\frac{1}{2}$	CA-048037	CA-048137	$3\frac{1}{2}$	—	*CA-048337
	—	—	—	—	—	—
# 5	$\frac{1}{4}$	CA-048041	CA-048141	$3\frac{1}{2}$	—	*CA-048341
	$1\frac{1}{2}$	†CA-048049	CA-048349	5	—	—
	$\frac{1}{8}$	—	—	—	CA-050226	Thin-Wall Hex.
	$\frac{7}{8}$	CA-050028	—	—	—	—
	$\frac{1}{4}$	CA-050030	—	—	CA-050230	—
	1	CA-050032	—	—	—	—
	$1\frac{1}{8}$	CA-050034	CA-050134	$3\frac{3}{8}$	—	*CA-050234
	$1\frac{1}{4}$	CA-050036	CA-050136	$3\frac{3}{8}$	—	—
	$1\frac{1}{2}$	†CA-050038	†CA-050138	$3\frac{3}{8}$	—	—
	$1\frac{3}{4}$	CA-050040	CA-050140	$3\frac{3}{4}$	—	*CA-050240
	$1\frac{1}{2}$	CA-050042	CA-050142	$3\frac{3}{4}$	Note: Symbol numbers in tinted areas indicate sockets with tapered hexagon openings for maximum torque transmission on high strength bolting.	
	$1\frac{3}{8}$	CA-050044	—	—		
	$1\frac{1}{4}$	CA-050046	CA-050146	$3\frac{3}{8}$		
	$1\frac{1}{2}$	†CA-050048	†CA-050148	$3\frac{3}{8}$		
	$1\frac{5}{8}$	CA-050052	—	—		
	$1\frac{3}{4}$	†CA-050056	—	—		
	$1\frac{3}{4}$	CA-050058	—	—		
	$1\frac{7}{8}$	CA-050060	—	—		
	2	CA-050064	—	—		

†Budd Wheel Sockets
 *Budd Rim Sockets

Socket Set Contents

Drive	Part No.	Use With	Size Across Flats (inches)
$\frac{3}{8}$	CA-046346	All $\frac{3}{8}$ " Wrenches	$\frac{3}{8}$, $\frac{7}{16}$, $\frac{1}{2}$, $\frac{9}{16}$, $\frac{5}{8}$, $1\frac{1}{16}$ Hex.
$\frac{1}{2}$	CA-047346	All $\frac{1}{2}$ " Wrenches	$\frac{1}{2}$, $\frac{9}{16}$, $\frac{5}{8}$, $1\frac{1}{16}$, $\frac{3}{4}$, $1\frac{1}{8}$ Hex.
$\frac{1}{2}$	CA-047347	All $\frac{1}{2}$ " Wrenches	$\frac{3}{4}$, $1\frac{1}{8}$, $\frac{7}{8}$, $1\frac{1}{4}$, $1\frac{1}{2}$ Hex.
$\frac{3}{4}$	CA-054365	All $\frac{3}{4}$ " Wrenches	$\frac{3}{4}$, $1\frac{1}{8}$, $\frac{7}{8}$, $1\frac{1}{4}$, $1\frac{1}{2}$, $1\frac{3}{4}$ Hex.; $1\frac{1}{2}$ Deep Hex.; $1\frac{1}{4}$ Sq.
# 4 Spl.	CA-054364	All # 4 Splined Wrenches	$\frac{3}{4}$, $1\frac{1}{8}$, $\frac{7}{8}$, $1\frac{1}{4}$, $1\frac{1}{2}$, $1\frac{3}{4}$ Spl. Hex.; $1\frac{1}{2}$ Sp. Deep Hex.; $1\frac{1}{4}$ Spl. Sq.; Spl. to $\frac{3}{4}$ " Sq. Adptr.
$\frac{3}{4}$	CA-096160	All 1" Wrenches	$\frac{7}{8}$, $1\frac{1}{8}$, $1\frac{1}{4}$ Std. Hex.; $1\frac{1}{2}$, $1\frac{3}{4}$ Thin Wall Hex.
1	CA-057502	All 1" Wrenches	$1\frac{1}{2}$ Hex., $1\frac{3}{4}$ Sq. and 1" to $\frac{3}{4}$ " Adapter.
1			$1\frac{5}{8}$, $1\frac{3}{4}$, $1\frac{1}{2}$, $1\frac{1}{4}$, $1\frac{3}{8}$, $1\frac{1}{2}$, $1\frac{1}{4}$ Thin Wall Hex.; $1\frac{1}{2}$ Deep Hex.; $1\frac{3}{4}$ Sq.
# 4 Spl.	CA-050438	All # 5 Splined Wrenches	$\frac{7}{8}$, $1\frac{1}{8}$, $1\frac{1}{4}$ Std. Hex.; $1\frac{1}{2}$ Thin Wall Hex.
# 5 Spl.			# 5 to # 4 Spl. Adapter; # 5 Spl. to 1" Sq. Adapter; $1\frac{1}{8}$, $1\frac{1}{4}$, $1\frac{1}{2}$ Spl. Hex.; $1\frac{3}{8}$, $1\frac{1}{2}$ Sp. Hex.; $1\frac{3}{4}$ Sq.
# 5 Spl.	CA-046156	All # 5 Splined Wrenches	$1\frac{1}{8}$, $1\frac{1}{4}$, $1\frac{1}{2}$, $1\frac{3}{8}$, $1\frac{1}{4}$, $1\frac{1}{2}$, $1\frac{3}{4}$, $1\frac{1}{2}$, $1\frac{1}{4}$ Deep Hex.; $1\frac{3}{4}$ Sq., # 5 Spl. to 1" Adapter.

CP Accessories—Miscellaneous

SOCKET ADAPTERS SQUARE & SPLINE DRIVE



Drive Size	Male End Size	Part Number
3/8	1/2	CA-046370
1/2	3/8	CA-047372
1/2	3/4	CA-047376
3/4	1/2	CA-048370
1	3/4	CA-049370
# 2 Spl.	1/2	CA-047373
# 4 Spl.	3/4	CA-048371
# 5 Spl.	3/4	CA-050370
# 5 Spl.	# 4 Spl.	CA-050371
# 5 Spl.	1	CA-050372
7/16" hex.	1/2	CA-047371

EXTENSION BARS SQUARE & SPLINE DRIVE



Drive	Lgth. (in.)	Part Number
3/8	3	CA-046380
3/8	6	CA-046382
1/2	5	CA-047380
3/4	6	CA-048380
3/4	10	CA-048382
1	6	CA-049380
1	8	CA-049382
# 4 Spl.	6	CA-048381
# 5 Spl.	8	CA-050382

UNIVERSAL JOINTS SQUARE & SPLINE DRIVE



Drive (in.)	Part Number
3/8	CA-046386
1/2	CA-047386
3/4	CA-048386
1	CA-049386
# 5 Spl.	CA-050386

QUICK-LOK ANGLE HEADS



Use With	Drive	Dimensions (in.)		Part Number
CP-720-721 CP-820-821	3/8	1 7/32	1 3/4	CA-046251 KF-125317
CP-734-740	1/2	3/4	2	CA-047253

LEATHER PROTECTOR COVERS



Tool Number	Part Number
CP-720	—
CP-721	CP-821
CP-734	CP-834
CP-740A	—
	CA-046390
	CA-046391
	CA-047393
	CA-047392

PVC CUSHION-COAT PROTECTOR COVERS



Tool Number	Part Number
CP-734	CA-125501
CP-740	CA-126071

AIR-WRENCH and PNEUMATIC® PUMP TUNE-UP KITS



For CP-705 Pump	Part No. A-048065
AIR-WRENCHES	
CP-720 Model "A"	CA-051508
CP-720 Model "B"	CA-051509
CP-721	CA-118880
CP-723	CA-126990
CP-732, CP-733	CA-051510
CP-734	CA-051511
CP-740 Model "A"	CA-051512
CP-740 Model "B"	CA-058920
CP-744	CA-126991
CP-750	CA-051513
CP-751	CA-118878
CP-770-B	CA-051514
CP-772	CA-053902
CP-791-A	CA-052464
CP-791-B	CA-125810
CP-792	CA-051515
CP-793-SH	CA-052462
CP-793-CH	CA-052463
CP-796	CA-126992
CP-797	CA-121594


CP Accessories—Zip-Gun® Accessories and Accessory Sets

ZIP-GUN ACCESSORIES .401 SHANK SIZE (USE WITH CP-710, 714, and 809)

Index No.	Part No.	Description	Accessory Set Numbers				
			A-050214	A-050215	A-050216	A-050217	A-050219
1	A-046050	Rivet Cutter	X	X	X	X	
2	A-046052	Bushing Splitter & Remover			X	X	
3	A-046053	# 6 Piercing Punch					
3	A-046054	# 8 Piercing Punch	X				
3	A-046055	# 10 Piercing Punch			X	X	
4	A-046056	Bush Drive Mandrel $\frac{3}{8}$ " & $\frac{1}{2}$ " O.D.			X	X	
5	A-046057	Universal Joint & Tie Rod Tool			X	X	
6	A-046059	1" Separator Fork				X	
6	A-046060	$\frac{3}{4}$ " Separator Fork					
7	A-046062	Needle Scaler					X
8	A-046063	Angle Scaling Chisel					X
9	A-046064	Diamond Point Chisel					X
10	A-046065	Round Nose Chisel					X
11	A-046071	Twin Blade Panel (pipe) Cutter	X	X	X	X	
12	A-046072	Goo Scraper & Flat Chisel Blank					
13	A-046073	Cold Chisel	X	X	X	X	X
14	A-046074	Straight Punch		X	X		
15	A-046075	Spot Weld Splitter	X				
16	A-046076	Edging Chisel	X				
17	A-046077	Muffler Splitter		X	X	X	
18	A-046078	Tapered Punch	X	X	X	X	
19	A-046087	Rivet Set $\frac{1}{8}$ " Round					
19	A-046088	Rivet Set $\frac{3}{16}$ " Round					
19	A-046089	Rivet Set $\frac{1}{4}$ " Round					
20	A-046090	Smoothing Hammer 1" Face					
20	A-046091	Smoothing Hammer 1 $\frac{3}{8}$ " Face					
21	A-046092	Flanging Tool/Handle	X				
22	A-046095	Quick Change Retainer					
23	A-046096	Bee-Hive Retainer	X	X	X	X	X
24	LP-121736	Posa-Lock Retainer					
	CA-127020	Carry Case	X	X	X	X	X

ZIP-GUN ACCESSORIES .498 SHANK SIZE (USE WITH CP-717)

Index No.	Part No.	Description	Accessory Set Numbers	
			A-050205	A-050207
1	A-047050	Rivet Cutter		
2	A-047051	Wide Cutting Chisel		
3	A-047052	Bushing Splitter		X
4	A-047057	Universal Joint & Tie Rod Tool		
5	A-047059	1" Separator Fork		X
5	A-047060	$\frac{3}{4}$ " Separator Fork		
5	A-047061	1 $\frac{1}{4}$ " Separator Fork		
6	A-047071	Twin Blade Cutter	X	X
7	A-047073	Cold Chisel	X	X
8	A-047074	Straight Punch	X	
9	A-047078	Tapered Punch		X
10	A-047091	1 $\frac{1}{4}$ " Smoothing Hammer		X
11	A-047095	Quick Change Retainer		
12	A-047096	Bee-Hive Retainer		X
	CA-047270	2' Leader Hose	X	X
	CA-047300	Quick Coupler	X	X
	CA-047302	Nipple	X	X
	CA-127020	Carry Case	X	X

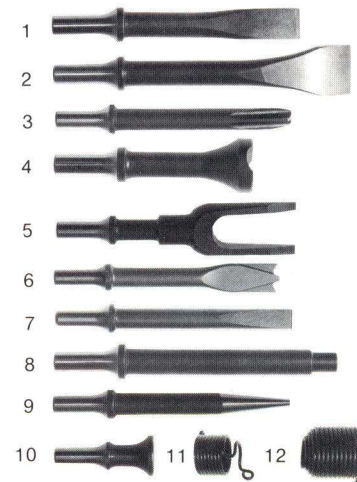

CP Accessories—Chucks and Screwdriving Attachments

JACOBS® DRILL CHUCKS					THREAD-MOUNTED PLAIN BEARING JACOBS® CHUCKS				
JACOBS® Chuck Model	Part Number	Capacity (Inches)	Thread Mount	Key Part No.	Keyholder (Jacobs®)	Replacement for Jacobs®	Supreme		
7B	CA-050073	0-1/4	3/8-24	CA-050119	K7	CA-050165	—	—	
7B	CA-050074	0-1/4	1/2-20	CA-050119	K7	CA-050165	—	—	
2B	CA-050082	0-3/8	3/8-24	—	K2	—	MC4K61 MC-4 MC-5 MC4K41	B13A H13A H2A BM13A	
DC4G61 (Multicraft)	CA-119848	0-3/8	3/8-24	CA-050100	KG	CA-050165	—	—	
32B	CA-050084	0-3/8	1/2-20	CA-050122	K32	CA-050166	—	—	
33B	CA-050090	5/16-1/2	1/2-20	CA-050122	K32	CA-050166	MC8K64 MC10R64 MC-10	B14B H5B —	
33B	CA-050091	5/16-1/2	3/8-24	CA-050122	K32	CA-050166	—	—	



JACOBS® DRILL CHUCK

1/2" Sq. Dr. takes
3/16" to 1/2" drills

Part Number
UA-047364



JACOBS® Drill and a Tap Chuck with collet and wrench

Sq. Dr.
3/8"
1/2"

Collet Capacity
0 to 1/4
3/16 to 3/8

Part No.
CA-046350
CA-047360

SCREWDRIVER ATTACHMENTS

Sq. Dr. (in.)	Hex. Bit (in.)	Part No. Magnetic Holder	1/2", 3/8" SQ.	3/16" SQ.	INSERT BIT FOR RECESSED HEAD SCREWS
3/8	1/4	CA-046200			
3/8	5/16	CA-046310			
1/2	5/16	CA-047310			

BITS BECOME MAGNETIZED WHEN USED WITH MAGNETIC HOLDERS

HEX. INSERT BITS

1/4" RECESSED HEAD			3/16" RECESSED HEAD		
Point	Description	Part No.	Point	Description	Part No.
	# 1 Phillips	CA-046201		# 2 Phillips	CA-046311
	# 2 Phillips	CA-046202		# 3 Phillips	CA-046312
	# 3 Phillips	CA-046203		# 4 Phillips	CA-046313
1/4" SLOTTED HEAD			3/16" SLOTTED HEAD		
Point	Blade Thickness	Part No.	Point	Blade Thickness	Part No.
	.045	CA-046206		.045	CA-046318
	.050	CA-046207		.050	CA-046319
	.056	CA-046208		.056	CA-046320
				.064	CA-046321
				.072	CA-046322


CA-047000 SCREWDRIVER KIT

for use with all Air-Drills equipped with 3/8"-24 threaded spindle. Has Quick-change Slip Chuck, three Phillips Bits and three Slotted Bits.



CP Accessories—Sanders, Polishers and Grinders

For CP-765S—CA-116812—Sander Attachment

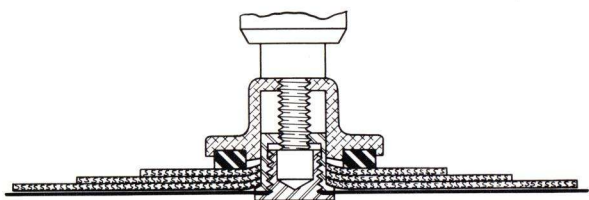


Index No.	CP Part No.	Description	No. Req'd.
1	CA-118508	Head-Pad	1
2	CA-118507	Locknut	1
3	CA-118505	Plate-Back Up (7")	1
3	CA-118506	Plate-Back Up (9")	1

For CP-864—Sanding Pad



Part Number	Description
KF-124300	5" Pad
KF-124301	6" Pad

For CP-765—CA-048005—Grinder Attachment

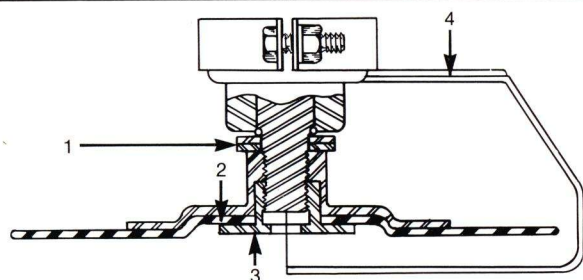


Index No.	CP Part No.	Description	No. Req'd.
1	C-050285	Spacer-Adapter	2
2	C-050286	Adapter	1
3	C-050287	Nut-Adapter	1
4	CA-057494	Guard-Wheel (7" Dia.)	1
5	—	Wheel-Grinding ($\frac{3}{16}$ " x 7")	1

For CP-865 and 869—KF-125316—Pad Assembly




Part Number	Description
KF-125434	Pad
KF-125481	Locknut

For CP-861 Sanding Pads

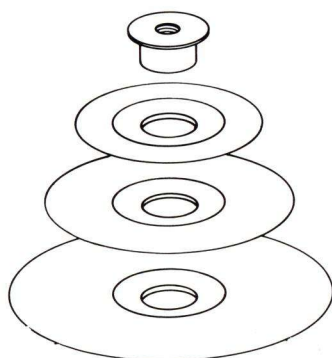

Part Number	Description
LC-121817	2½" Pad
LC-121818	4½" Pad
LC-121819	5½" Pad
LC-121812	Locknut

For CP-867—KF-124604—Sanding Shoe



For all drills—LC-121735—Random Orbital Oscillator Attachment




(Use with any Standard Drill)

For CP-863—LC-121824—Sanding Pad



For CP-866—KF-125126—Sanding Pad

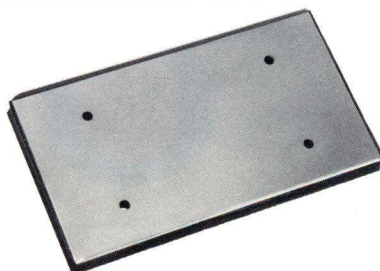


For CP-869P—KF-125423—Polishing Pad



(Use with KF-125316 Pad Assembly)

CP Accessories—Air Line

QUICK-CHANGE COUPLERS NOTE: Numbers in parentheses indicate mfg. identification stamped on couplers.

				
Coupler Size	Thread Size	Body FPT	Nipple FPT	Nipple MPT
1/4"	1/4"	CA-046300 (13)	CA-046301 (3c)	CA-046302 (2c)
3/8"	1/4"	CA-047300 (15c)	CA-047302 (1e)	CA-047303 (0e)
3/8"	3/8"	CA-047301 (15)	CA-047304 (3e)	CA-047305 (2e)
1/2"	3/8"	CA-049300 (17e)	CA-049302 (1f)	CA-049303 (0f)
1/2"	1/2"	CA-049301 (17)	CA-049304 (3f)	CA-049305 (2f)

LEADER AND AIR HOSE

Hose Dia. (in.)	Thread Size (in.)	Hose Lgth. (ft.)	Part Number
1/4	1/4	6	CA-046270
3/8	1/4	2	CA-047270
3/8	1/4	6	CA-047271
1/2	3/8	3	CA-049271
1/2	1/2	2	CA-049270
3/8	1/4	25	CA-047274
3/8	1/4	35	CA-047272
3/8	1/4	50	CA-047273
1/2	1/2	50	CA-049272

PROTECTO-LUBE™ AIR-TOOL OIL



Protecto-lube is prepared specifically for all rotary and piston-type air tools. It lubricates moving parts, prevents rust formation, and insures smoother starts. It dissolves gums and sludges that rob tools of speed and efficiency. Use it to insure top performance, maximum productivity, longer tool life.


1-pint can CA-046000

LC-121737 Air Regulator




- Attaches to all air tools with 1/4" air inlet thread size.
- Provides positive regulation of air intake.

TYPICAL AIR HOSE AND COUPLING ASSEMBLY

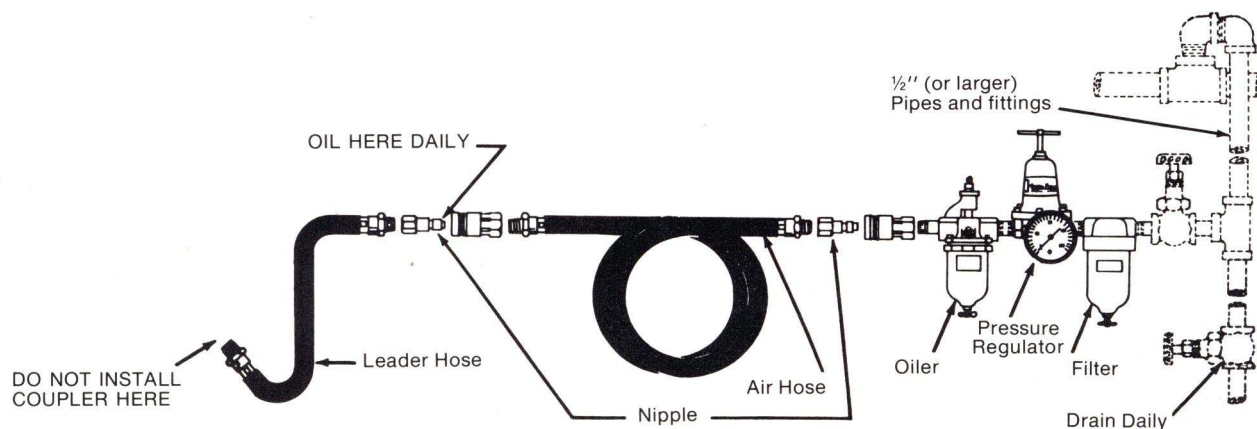

CP Accessories—Air Line

FILTER/MOISTURE SEPARATOR—PRESSURE LUBRICATOR REGULATOR—LINE LUBRICATOR

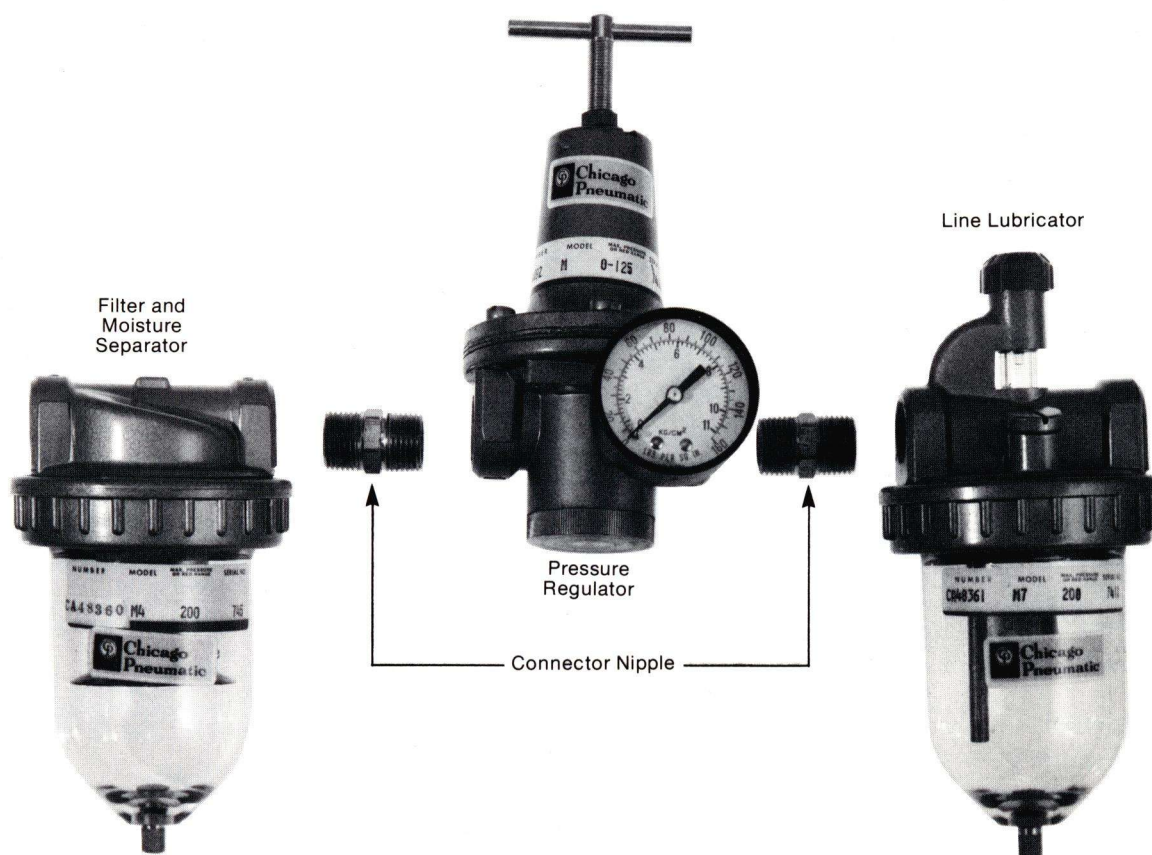

By installing the illustrated water separator, regulator and line lubricator the life of the air tool is greatly increased. The water separator traps the moisture before it enters the air tool. The pressure regulator can be adjusted so that the correct air pressure enters the tool while high pressures are maintained at the compressor. The line lubricator allows the proper amount of lubrication needed for top performance.

Description		Part No.
Filter/Moisture Separator	1/2" line size	CA-048360
Line Lubricator		CA-048361
Pressure Regulator		CA-048362
Connector Nipple		CA-048363

CP Service Centers

AUTHORIZED CP SERVICE CENTERS

Alabama

Power Tool Service Co., Inc.
1113-4th Avenue South
Birmingham, Alabama 35233

Alaska

B & B Tool Sales Co.
2600 Seward Highway
Anchorage, Alaska 99503

Arizona

Arizona Air Tool, Inc.
1314 E. Princess Drive
Tempe, Arizona 85281

California

Kimmerle Brothers
337 M Street
Fresno, California 93721
Kimmerle Brothers
2300 South Hill Street
Los Angeles, California 90007
Kimmerle Brothers
226 11th Street
San Francisco, California 94103

Colorado

CP Factory Service Center
3931 Holly Street
Denver, Colorado 80207

Connecticut

Industrial Hydraulic, Inc.
482 Honeyspot Road
Stratford, Connecticut 06497
John The Jack Man & Co.
P.O. Box 33
Stafford Springs, Conn. 06076

Florida

Nestor Precision Tool Co.
11885 44th St. No.
Clearwater, Florida 33520
Nieman-Wilson, Inc.
274 N.W. 54th Street
Miami, Florida 33127

Georgia

Tool Service Co., Inc.
249 Alexander Street, N.W.
Atlanta, Georgia 30313

Hawaii

Art C. Neely, Inc.
3035 Koapaka Street
Honolulu, Hawaii 96819

Illinois

Lohse Automotive, Inc.
500 16th Street
Rock Island, Illinois 61201

Servall Engineering Co.
3937-41 No. Kedzie Avenue
Chicago, Illinois 60618
Universal Joint & Motor Parts
2115 S. Wabash Avenue
Chicago, Illinois 60616

Indiana

Electric Tool & Motor Ser. Inc.
1001 No. Illinois Street
Indianapolis, Indiana 46204
Servall Engineering Co.
638 Sibley Street
Hammond, Indiana 46320

Kansas

Hydraulic Equipment Co.
314 N. Water Street
Wichita, Kansas 67202

Kentucky

Queen Hydraulics
1226 Rowan Street
Louisville, Kentucky 40203

Louisiana

Beerman Precision
Machine Works, Inc.
2021 Thalia Street
New Orleans, Louisiana 70150

Maryland

Baltimore Hydraulics, Inc.
700 East 25th Street
Baltimore, Maryland 21218

Massachusetts

Boston Hyd. Sales & Serv. Inc.
1601 Columbus Avenue
Boston, Massachusetts 02119

Michigan

Hydraulic Equipment Service, Inc.
1401 Alpine Avenue, N.W.
Grand Rapids, Michigan 49504
Hydraulic Service, Inc.
2151 Ryan Road
Warren, Michigan 48091

Minnesota

North Star Service & Supply
3529 East Lake Street
Minneapolis, Minn. 55406

Missouri

Heath Sales & Service, Inc.
518 East 16th Street
Kansas City, Missouri 64108
St. Louis Compressor Service
2017 Locust Street
St. Louis, Missouri 63103

Montana

Mosch Electric Motors
326 Third Avenue, South
Great Falls, Montana 59401

Nebraska

Thacker Electric Co.
2209 Cumming Street
Omaha, Nebraska 68102

New Jersey

Fairfield Power Service, Inc.
834 Fairfield Avenue
Kenilworth, New Jersey 07033

New York

Duplex Equipment Company
213 Grand Avenue
Syracuse, New York 13204
United Electric Motors, Inc.
614 Winslow Avenue
Buffalo, New York 14211

North Carolina

Power Tool Service, Inc.
2407 Alwin Court
Raleigh, N.C. 27604
Power Tool Service, Inc.
4010 N. Graham Street
Charlotte, N.C. 28206
Power Tool Service, Inc.
807 Huffman Street
Greensboro, N.C. 27402
Power Tool Service, Inc.
150 Kapp St.
Winston-Salem, N.C. 27105

Ohio

Electrical Tool Service Co.
3734 Payne Avenue
Cleveland, Ohio 44114
Myers Tire Supply Co.
1293 So. Main St.
Akron, Ohio 44301
Pleasant Electric Co.
1725 Central Avenue
Cincinnati, Ohio 45214

Oklahoma

Hydraulic Equipment Co.
515 South Broadway
Oklahoma City, Oklahoma 73125
Hydraulic Equipment Co.
2423 East Admiral Blvd.
Tulsa, Oklahoma 74110

Oregon

Karn Repair Service
1215 S.W. 16th Avenue
Portland, Oregon 97205

Pennsylvania

Equipment Service Co.
1921 Callowhill Street
Philadelphia, Pennsylvania 19130
Mac's Hyd. Jack & Equip. Ser.
121 Putnam Street
Pittsburgh, Pennsylvania 15206
Power Tool Service
38 W. Allen St.
Mechanicsburg, Pa. 17055

Tennessee

Alcott Sales and Service
812 Polk Ave.
Memphis, Tennessee 38126
Tennessee Electric Motor Co.
408 6th Avenue South
Nashville, Tennessee 37203

Texas

CP Factory Service Center
2257 Vantage Street
Dallas, Texas 75207
Dave Hill Wholesale Auto Supply
410 South Sante Fe Street
El Paso, Texas 79930
Power Tool Service
3718 Polk Avenue
Houston, Texas 77003
Wesbrooks Hydraulic Equip.
Service Co.
2012 Sheppard Access Road
Wichita Falls, Texas 76304

Utah

H. K. Power Tool Service Inc.
305 West 1600 South
Salt Lake City, Utah 84115

Virginia

Wolff Brothers
2607 West Cary Street
Richmond, Virginia 23220

Washington

K & N Electric Motors, Inc.
1311 North Washington Street
Spokane, Washington 99210
Universal Repair Shop
1611 Boylston Avenue
Seattle, Washington 98122

Wisconsin

Power Tool Service
310 N. Webster Avenue
Green Bay, Wisconsin 54301

Automotive Tool Customer Service

Chicago Pneumatic tools are designed, manufactured and tested to exacting specifications to insure the customer unsurpassed quality. This quality is reflected constantly by the increasing number of "CP" tools found in garages, fleet shops, dealerships and specialty shops.

However, customer satisfaction is not limited to performance. Eventually, all tools will require some service.

To insure prompt, efficient repairs, over 50 Chicago Pneumatic authorized service stations are conveniently located in the United States and Canada. These stations maintain a complete stock of genuine Chicago Pneumatic parts and have factory

trained personnel capable of rendering complete customer satisfaction.

When forwarding a tool for repair, the following information should be given:

1. Reason for repair (some idea of what is wrong).
2. Whether an estimate is needed before tool is repaired.
3. If for warranty consideration, include copy of invoice showing original user purchase date.

For your convenience, all Chicago Pneumatic stations carry a complete line of tool accessories including sockets, adapters, chucks, air hose, couplers, nipples, Zip-Gun chisels and Quick-Lok Angle Heads.

CP Branch Offices

DOMESTIC SALES OFFICES

Atlanta, Ga.

517 Armour Circle, N.E.
Atlanta, Ga. 30324
404-874-8692

Boston, Mass.

200 Third Avenue
Waltham, Mass. 02154
617-890-1400

Buffalo, N.Y.

65 Benbro Drive
Buffalo, N.Y. 14225
716-685-4510

Chicago, Ill.

2525 Lexington Street
Broadview, Ill. 60153
312-921-0300

Cincinnati, Ohio

10361 Spartan Drive
Cincinnati, Ohio 45215
513-771-0260

Cleveland, Ohio

5360 West 130th St.
Cleveland, Ohio 44142
216-267-1430

Dallas, Texas

2257 Vantage Street
Dallas, Texas 75207
214-631-0230

Denver, Colo.

3931 Holly Street
Denver, Colo. 80207
303-399-0774

Detroit, Mich.

32200 North Avis Drive
Madison Heights, Mich. 48071
313-583-9200

Houston, Texas

5950 Corporate Drive
Houston, Texas 77036
713-777-0211

Kansas City, Mo.

6101 Arlington St.
Raytown, K.C., Mo. 64153
816-356-3623

Los Angeles, Calif.

6935 Bandini Blvd.
Los Angeles, Calif. 90040
213-726-6821

Milwaukee, Wisc.

2075 So. 170th St.
New Berlin, Wisc. 53151
414-782-2030

Minneapolis, Minn.

2812 East 26th St.
Minneapolis, Minn. 55406
612-721-5725

New York, N.Y.

80 Wesley St., So.
Hackensack, N.J. 07606
201-488-4362
New York, N.Y.
212-947-5772

Philadelphia, Pa.

312 East Lancaster Ave.
Wynnewood, Pa. 19096
215-649-9300

Pittsburgh, Pa.

4853 Campbell's Run Road
Pittsburgh, Pa. 15205
412-923-1850

St. Louis, MO.

8029 Litzsinger Rd.
St. Louis, Mo. 63144
314-645-7511

San Francisco, Calif.

145 Mitchell Ave., So.
San Francisco, Calif. 94080
415-589-2342

Seattle, Wash.

131 Andover Park East
Seattle, Wash. 98188
206-246-1600

MANUFACTURING PLANT

Utica, N.Y.
2200 Bleecker Street
Utica, N.Y. 13503

WARRANTY: The Company agrees to repair, or to duplicate F.O.B. its authorized service centers, any part of its own manufacture providing to its satisfaction to be defective from faulty workmanship or material, provided written notice is given immediately upon discovery of such defect and the defective part is promptly returned by an authorized service center to the place

of manufacture, all carrying charges prepaid. Outside purchased equipment and accessories are guaranteed only to the extent that the Company recovers under the original manufacturer's guarantee. The Company shall not be held liable for any contingent damages or delays caused by defective material and will make no allowance for repairs or alterations made without its written consent.



TOOL DIVISION
Chicago Pneumatic

UTICA, NEW YORK 13503